
JOSAM 12714-HS SERIES COATED CAST IRON SINGLE VERTICAL 4" HUB & SPIGOT FITTING WITH 2" HUB & SPIGOT RIGHT-HAND OFFSET VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.

CLOSET CARRIER

VERTICAL WITH RIGHT HAND VENT

SERIES

12714-HS

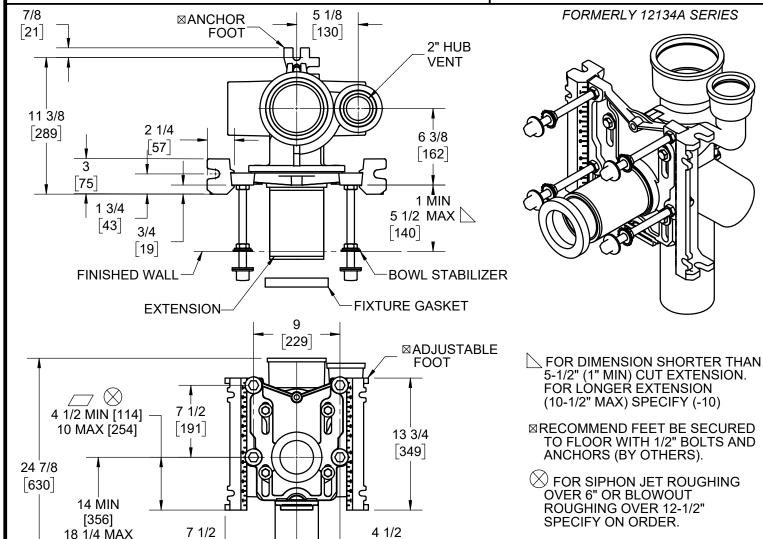

[114]

	-XSD	EXTRA SPECIAL-DUTY 1,000 LB CARRIER
	-PF	PYLON FOOT, STD.
	-OR	O-RING CARRIER
Х	-HS	HUB & SPIGOT
	-LH4	LEFT-HAND 4" NO-HUB BRANCH
	-HLH4	LEFT-HAND 4" HUB BRANCH
	-RH4	RIGHT-HAND 4" NO-HUB BRANCH
	-HRH4	RIGHT-HAND 4" HUB BRANCH
	-D4	DOUBLE 4" NO-HUB BRANCHES
	-HD4	DOUBLE 4" HUB BRANCHES
	-VP	VANDAL-PROOF TRIM

[190]

[464]

-1	POSITIONING FRAME
-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)
-10	ABS EXTENSION THROUGH 10-1/2" WALL
-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
-32	CARRIER FOR WIDE CHASE INSTALLATIONS
-35	CARRIER FOR WHEELCHAIR HIGH ROUGH
-49	NO-HUB AUXILIARY INLET, UNDER VENT
-50	NO-HUB AUXILIARY INLET, OPPOSITE VENT
-53	THREADED AUXILIARY INLET, UNDER VENT
-54	THREADED AUXILIARY INLET, OPPOSITE VENT

DATE OF LAST CHANGE: 11/01/22 JTJ

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



NOTES

SIPHON JET DIMS SHOWN.

FOR BLOWOUT DIMS, USE:

7 MIN 11" & MAX 16-1/2"