

60100H-SAP

Grease Interceptor W/ Sensing and Alarm Probe


Specification

Josam 60100H-SAP series epoxy coated fabricated steel grease interceptor, no-hub connections, internal trap, removable diffuser baffles, gasketed non-skid cover, flow control fitting PDI seal of approval and wall mounted controller for factory installed wireless sensing and alarm probe (SAP) probe assembly.

Conforms to plumbing and drainage institute standard PDI-G101.

Control box not shown

(SAP control box must be within 5ft of interceptor)

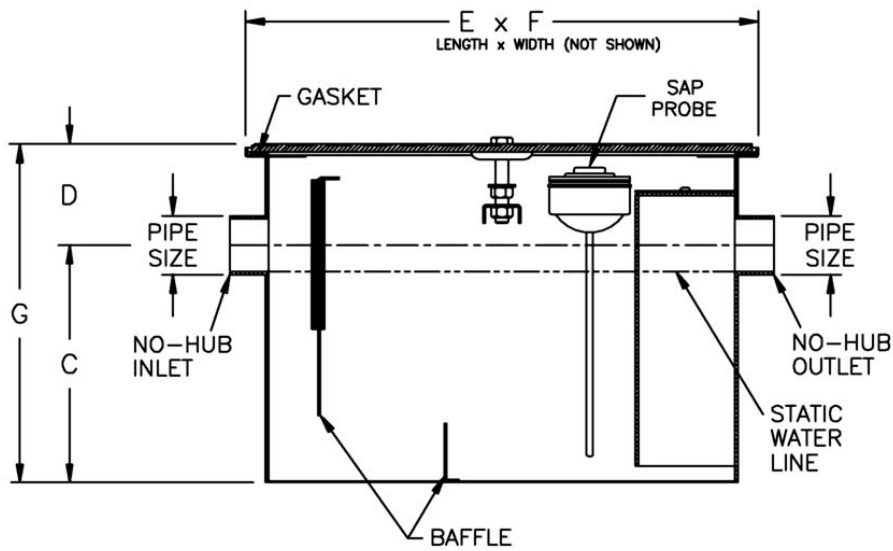

-SAP	Sensing and alarm probe
-61	Flange and clamp deviced
-EXT	Extencion, 6" standard (specify extencion height)
-SS	Stainless steel interceptor

Type	Flow rate	Cap LBS	Pipe size	C	D	E	F	G
60104H-SAP	15	30	2	9-1/2	3-3/8	20-3/8	17	12-7/8
60105H-SAP	20	40	3	12	4-7/8	20-7/8	19	16-7/8
60106H-SAP	25	50	3	13	4-7/8	23-3/8	21-1/2	17-7/8
60107H-SAP	35	70	3	14-1/2	4-7/8	26-1/8	23	19-3/8
60104H-SAP	50	100	3	16-1/2	4-7/8	27-7/8	25-1/2	21-3/8

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand