

**SPECIFICATION:**


JOSAM 60115-SA SERIES EPOXY COATED FABRICATED STEEL SEMI-AUTOMATIC GREASE INTERCEPTOR, SHALLOW ON-FLOOR TYPE, THREADED CONNECTIONS, INTERNAL AIR-RELIEF, VISIBLE DOUBLE WALL TRAP, REMOVABLE BAFFLE, GASKETED NON-SKID COVER GREASE RECOVERY CONE, FLEXIBLE HOSE, GREASE DRAW-OFF VALVE AND FLOW CONTROL FITTING.

**GREASE INTERCEPTOR  
SEMI-AUTOMATIC LOW TYPE**

**SERIES 60115-SA**

FORMERLY 60110-50A SERIES

NOTE: HEIGHT OF 8-1/2" REQUIRED FROM TOP OF INTERCEPTOR TO BOTTOM OF FIXTURE.

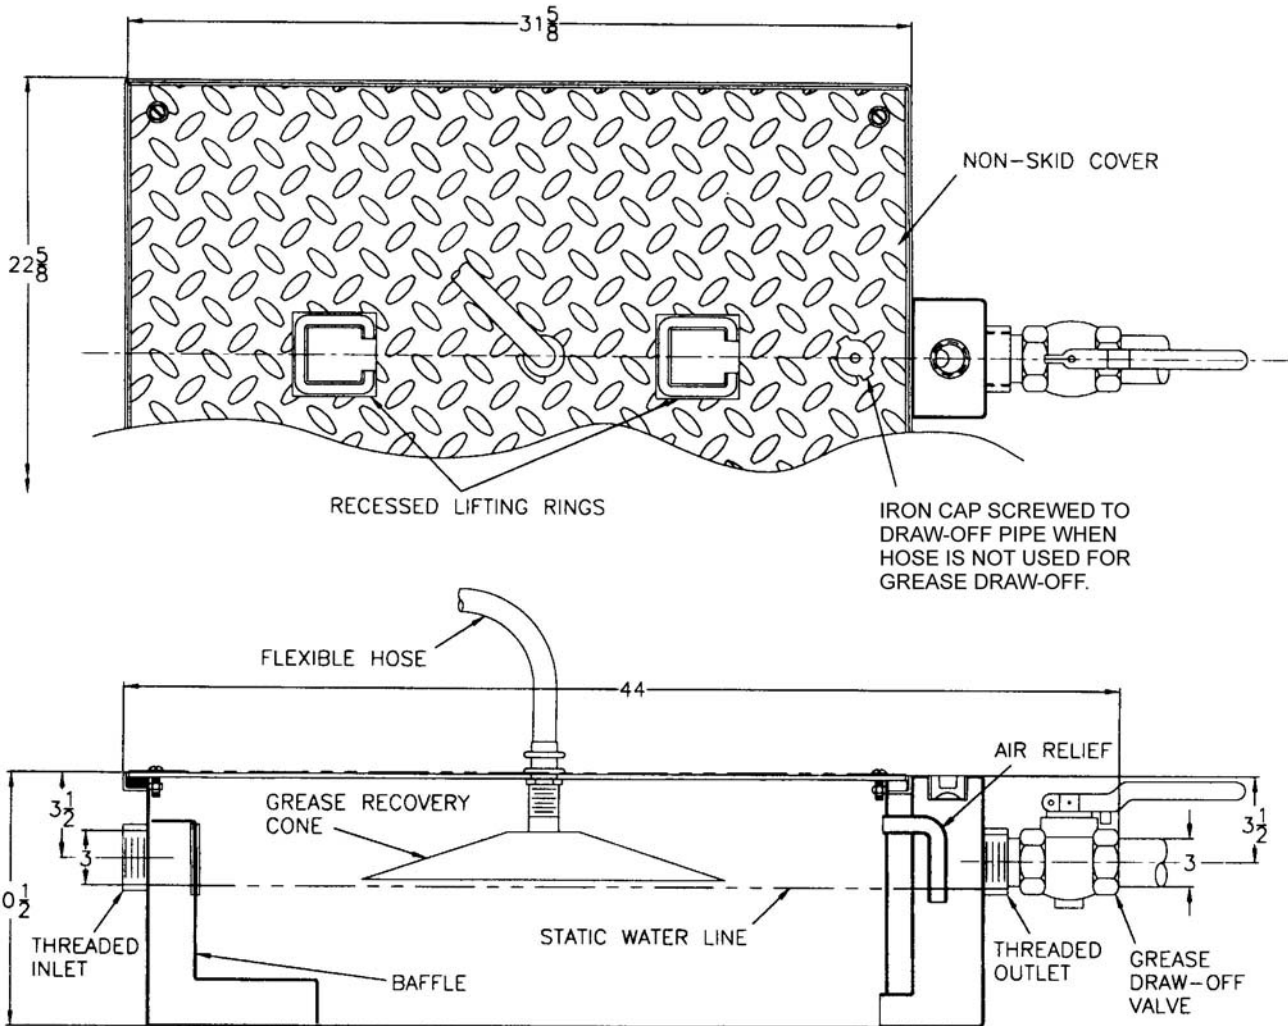

- 65 HUB INLET, SPIGOT OUTLET 2"
- 66 HUB INLET, SPIGOT OUTLET 3"
- 85 ENZYMATIC PORT IN COVER

TYPE	FLOW RATE	CAP. LBS.
60115A-SA	35	70

DRAWING No. 6/30/08

**A-14488-K**

**JOSAM COMPANY**  
MICHIGAN CITY, INDIANA

NOTES: