

## 60610-EST SERIES

with External Storage Tank

### APPLICATION




For use in service stations, parking garages, car and truck washes, industrial plants and elevator pits where discharged water contains high volumes of waste laden with oil, sediment and other volatile liquids. Separator collects oil and conveniently permits the collected oil to be drained directly to the integral storage tank by means of an adjustable gravity draw-off connection. Sediment and debris are collected in a sediment bucket that can be periodically removed.

### SPECIFICATION

JOSAM 60610-EST Series fabricated Oil Separator, epoxy coated inside and outside, flush-with-floor type with oil storage tank, threaded connections, flat bottom, visible double-wall trap, sediment bucket, gasketed cover, check valve and flow control fitting.

### Available Options

- EXT Extension, 8" Standard, Specify Extension Height
- HD Heavy-Duty Cover
- 19 Reclaim Tank Alarm
- 60 Anchor Flange
- 61 Flange and Clamp Device

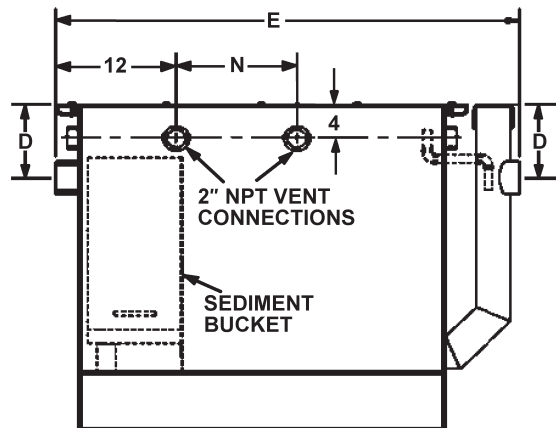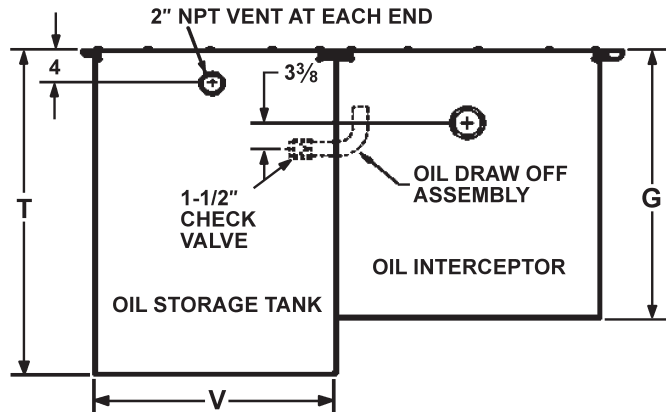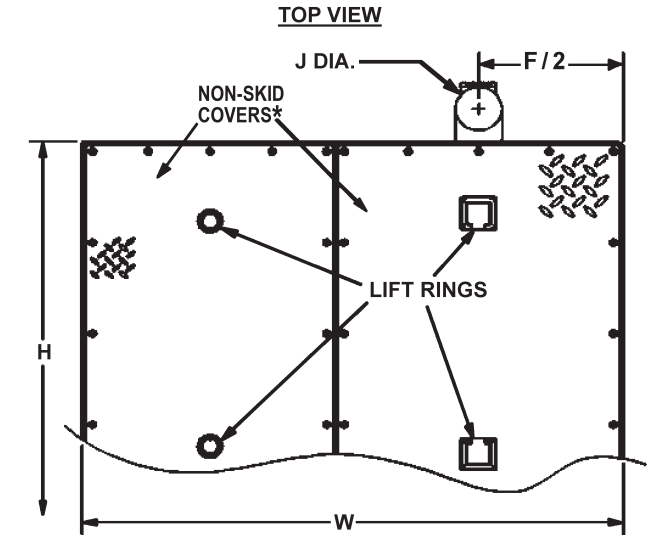

TYPE	FLOW RATE	TANK (GAL.)	PIPE SIZE	D	E	F	G	H	J	N	T	V	W	LBS.
60611-EST	75	100	3	8	46	31	29	41	4	12	37	24	59	1200
60612-EST	100	250	4	8	54	35	31	47	5	14	48	35	70	1500
60613-EST	150	250	4	10	60	39	37	53	5	16	45	35	74	2000
60614-EST	200	250	5	15	67	42	49	54	6	18	48	35	77	2400
60615-EST	250	500	5	15	72	46	51	63	6	20	60	45	91	3000
60616-EST	350	500	6	15	80	52	55	71	6	23	56	45	97	3800
60617-EST	500	500	6	26	91	59	70	83	6	27	66	45	104	5200

\* 60611-EST, 61612-EST and 61613-EST FURNISHED WITH ONE-PIECE COVER.

INTERCEPTORS