SPECIFICATION:


JOSAM 14444 SERIES COATED CAST IRON 4" NO-HUB BACK-TO-BACK VERTICAL OFFSET FITTING WITH 2" NO-HUB VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.


CLOSET CARRIER


BACK-TO-BACK, VERTICAL 4" NO-HUB AND 2" VENT

SERIES

14444

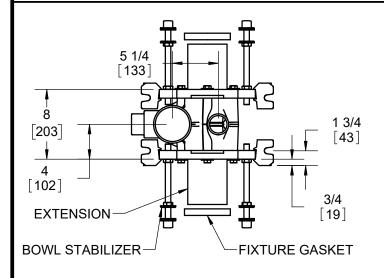



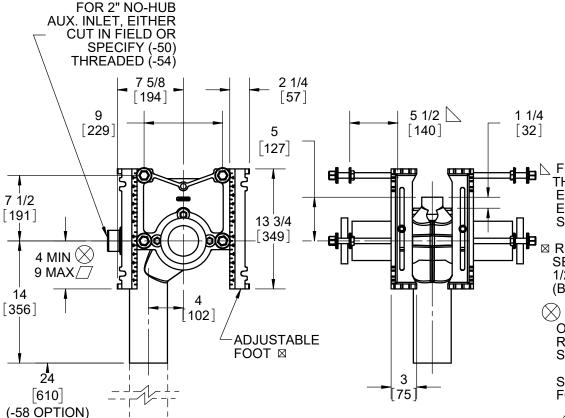

FOR DIMENSION SHORTER
THAN 5-1/2" (1" MIN) CUT
EXTENSION FOR LONGER
EXTENSION (10-1/2" MAX)
SPECIFY (-10).

☑ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

/ MIN 11" & MAX 16 1/2"

-SD	SPECIAL DUTY 500 LB CARRIER		
-SDH	SPECIAL DUTY HIGH 750 LB CARRIER	-30	CAST IRON ADJ EXT W/ CONNECTOR
-VP	VANDAL-PROOF TRIM	-30-2	CAST IRON ADJ. EXT. W/ CONN & TEST CAP
-1	POSITIONING FRAME	-50	NO-HUB HIGH AUX. INLET, OPPOSITE VENT
-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)	-54	THREADED HIGH AUX. INLET, OPPOSITE VENT
-10	ABS EXTENSION THROUGH 10-1/2" WALL	-58	LONG BARREL FITTING
-24	CARRIER FOR FLOOR MOUNTED BACK OUTLIFT CHINA BOWLS	-XSD	EXTRA SPECIAL DUTY 1.000 LB CARRIER

DATE OF LAST CHANGE: 8/10/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA. JOSAM MICHIGAN CITY, INDIANA NOTES