
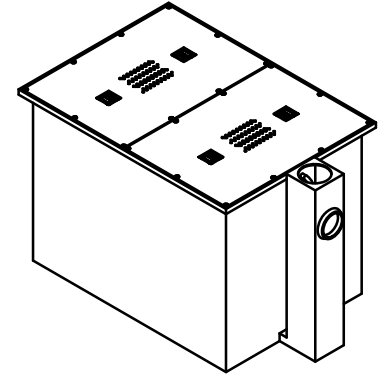


SPECIFICATION:


JOSAM 60210A SERIES ACID RESISTANT EPOXY COATED (INSIDE AND OUT) FABRICATED STEEL GREASE INTERCEPTOR, HIGH VOLUME, THREADED CONNECTIONS, INTERNAL AIR-RELIEF, VISIBLE DOUBLE WALL TRAP, REMOVABLE DIFFUSER BAFFLE, GASKETED NON-SKID COVER AND FLOW CONTROL FITTING.

**GREASE INTERCEPTOR
MANUAL HIGH-VOLUME TYPE**

SERIES **60210A**

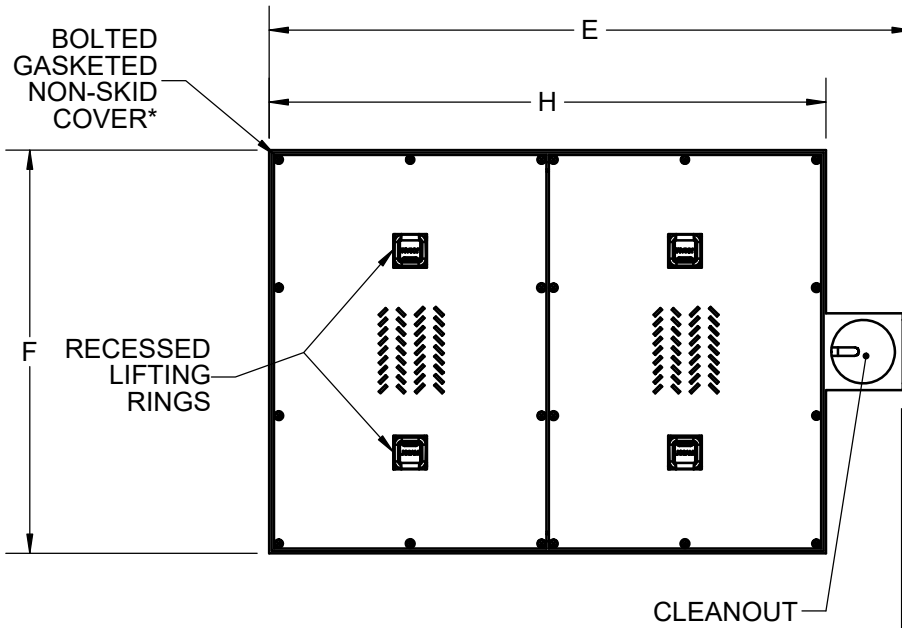

-EXT
Specify New "D" Dimension = _____ in.
Confirm New "G" Dimension = _____ in.
("C" FROM TABLE + NEW "D")

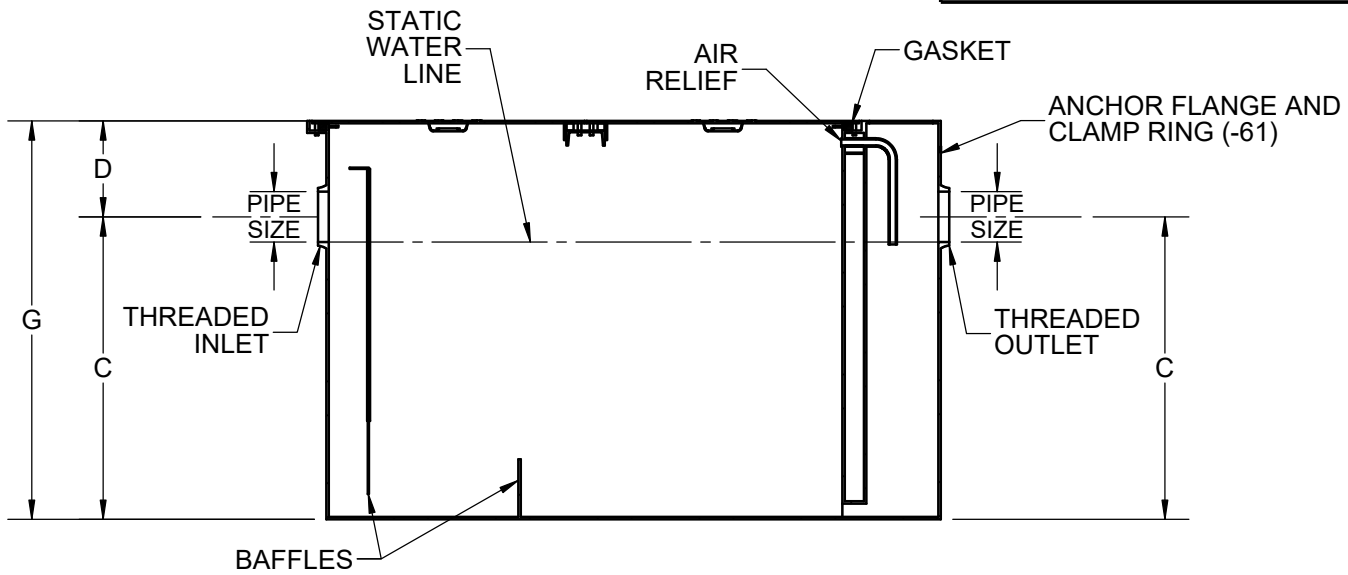

PRODUCT IS NON-CANCELABLE AND NON-RETURNABLE NAME: _____ SIGNATURE: _____ DATE: _____

-EXT	EXTENSION, SPECIFY DIMS. ABOVE
-60	ANCHOR FLANGE
-61	FLANGE AND CLAMP DEVICE
-ISI	INTEGRATED SOLIDS INTERCEPTOR
-HD	HEAVY-DUTY COVER

TYPE	FLOW RATE	CAP. (LBS)	PIPE SIZE	C	D	E	F	G	H
60213A	150	300	4	27	8	60	39	35	53
60214A	200	400	5	31-1/2	10	67	42	41-1/2	58
60215A	250	500	5	35-1/2	10	72	46	45-1/2	63
60216A	350	700	6	39-1/2	12	80	52	51-1/2	71
60217A	500	1000	6	43-1/2	12	91	59	55-1/2	82

△ SEPARATE SUBMITTAL FOR THIS OPTION AVAILABLE

*THIS SIZE FURNISHED WITH ONE-PIECE COVER

DATE OF LAST CHANGE: 12/05/24

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



MICHIGAN CITY, INDIANA

NOTES

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov