
JOSAM 60500B-EXT SERIES EPOXY COATED FABRICATED STEEL OIL SEPARATOR, THREADED CONNECTIONS, DEEP ROUGHING, INTERNAL EXTENSION, INTERNAL TRAP, SEDIMENT BUCKET, TWO-VENT CONNECTIONS ON EACH SIDE, GASKETED NON-SKID COVER AND FLOW-CONTROL FITTING.

OIL SEPARATOR DRAW-OFF, GRAVITY TYPE

60500B-EXT **SERIES**

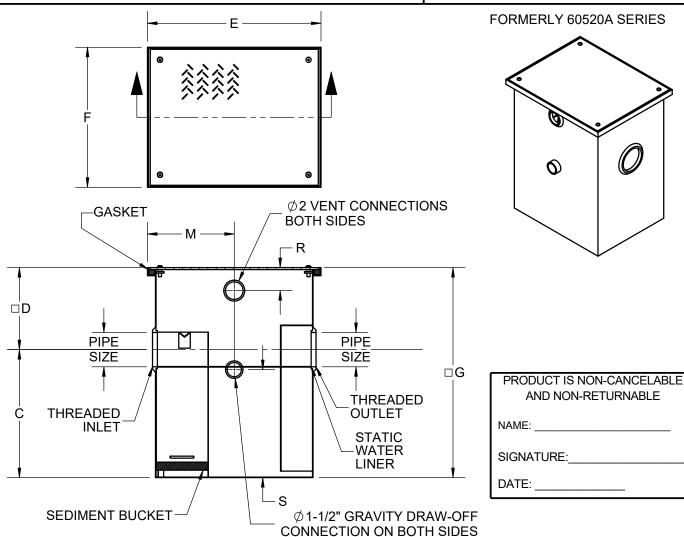

Х	-EXT	EXTENSION, 6" STANDARD (SPECIFY EXT. HEIGHT)
	-EST	EXTRA STORAGE TANK
	-60	ANCHOR FLANGE (5" DOWN FROM TOP)
	-61	FLANGE AND CLAMP DEVICE (5" DOWN FROM TOP)
	-HD	HEAVY-DUTY COVER (MUST SPECIFY WITH SEPARATOR ORDER)

FOR CUSTOM EXTENSION HEIGHT:									
SPECIFY "D" DIMENSION= IN.									
NEW "G" DIMENSION= IN. ("C" + "D")									

TYPE	FLOW RATE (GPM)	PIPE SIZE	С	□ D	Е	F	□G	М	R	S
60503B	10	2"	10 1/2"	10 1/8"	15 1/2"	12 3/8"	20 5/8"	7 3/4"	2 3/4"	6 3/4"
60504B	15	2"	12 3/4"	9 3/8"	18 1/4"	14 1/2"	22 1/8"	9 1/8"	2 3/4"	9"
60505B	20	*3"	14 5/8"	10 3/8"	20"	16 3/8"	25"	10"	2 3/4"	10 1/4"
60506B	25	*3"	16"	10"	21 3/4"	17 1/2"	26"	10 7/8"	2 3/4"	11 3/4"
60507B	35	*3"	16 3/4"	10 7/8"	25 1/4"	19 1/4"	27 5/8"	12 5/8"	2 3/4"	12 1/2"
60508B	50	*3"	18 1/2"	12 1/4"	28 3/4"	21 1/2"	30 3/4"	14 3/8"	2 3/4"	14 1/4"

□ DIMENSIONS BASED ON STANDARD 6" EXTENSION

05/23/23 JTJ

* 3" SIZES NORMALLY FURNISHED WITH 4" x 3" REDUCING BUSHINGS

DATE OF LAST CHANGE: DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE.
WE CAN ASSUME NO RESPONSIBILITY FOR

USE OF SUPERSEDED OR VOID DATA.



NOTES