


FIXTURE CARRIERS


Options

The options shown below and on the next page illustrate and explain various optional carrier components. These options must be specified and installed when the type of construction or fixture dictates their use. When these are used, trouble-free installations can be achieved. See specific series for available options.

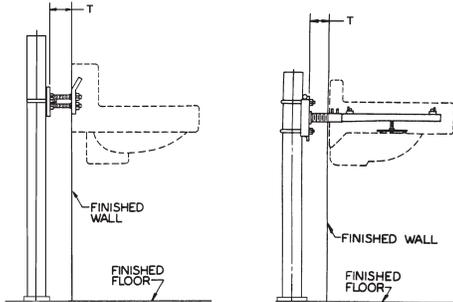


(-10) OPTION, EXTENSION FOR THICK WALLS

This option provides the extension hardware required for mounting fixtures when the wall thickness (dimension T) is greater than the maximum thickness specified. Dimension T should be specified when ordering this option.

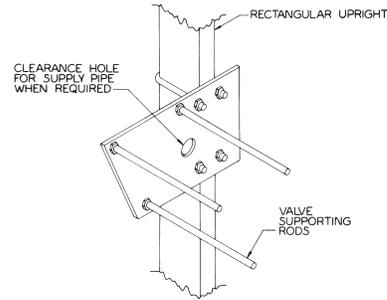


(-60) OPTION, VALVE PLATE ON UPRIGHT

With the addition of this valve plate, carriers with uprights can be converted to support both hospital lavatories and knee or foot operated valves supplying these lavatories. Valve plate is securely fastened to upright and is supplied with hardware and chrome plated trim for mounting valve. When required, a clearance hole for supply piping is provided.

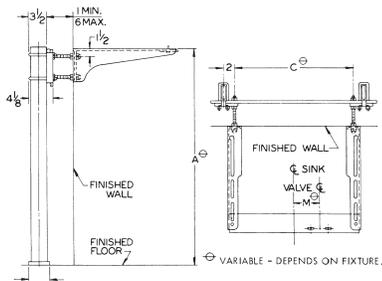


(-61) OPTION, VALVE PLATE BAR BETWEEN UPRIGHTS

This bar adapts exposed arm type carriers so that valves of the hanging type can be securely mounted. Hardware and chrome plated trim are supplied with this option.

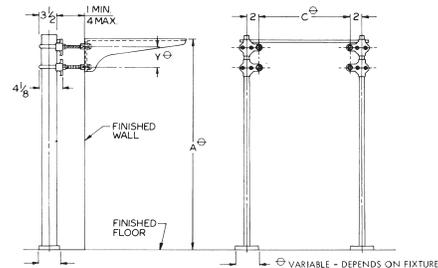


(-66) OPTION, SPLIT HEADER FOR STAINLESS STEEL ARMS

In many cases, arms are supplied by the fixture manufacturer. This most frequently is encountered when using some manufacturers' stainless steel fixtures. The mounting hole spacing in the back of the arm (Y Dim.) varies from sink to sink as well as manufacturer to manufacturer. JOSAM has designed headers which are adjustable which allow for the mounting of this type sink and arm combination.

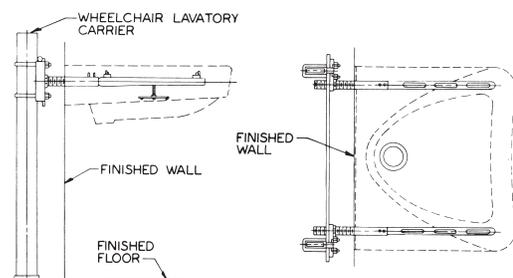

(-67) OPTION, CONCEALED ARM WHEELCHAIR LAVATORY

Most major fixture manufacturers offer an elongated lavatory especially designed for the wheelchair user. This lavatory requires a special type carrier which roughs the lavatory higher than normal and also will support the long extension of china.

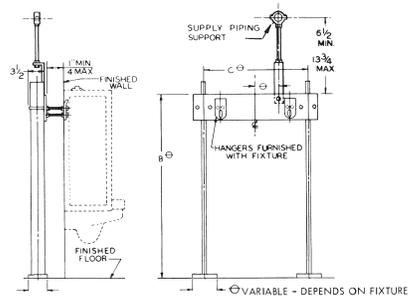

(-69) OPTION, URINAL SUPPLY PIPE SUPPORT

Support assembly attaches to an upper hanger or support plate and securely holds water supply pipe running to the flush valve. Hanger prevents movement of water pipe during and after construction, protecting piping as well as the flush valve. When ordering, specify type of pipe to be supported.