


30304-Z SERIES CAST IRON BODY

APPLICATION
For use with all adjustable strainers in ground-floor installations where clamp device is not required.

SPECIFICATION
JOSAM 30304-Z Series coated cast iron body threaded to receive JOSAM adjustable strainers, no-hub bottom outlet.

THIS DRAIN BODY CAN BE USED WITH ALL STRAINERS AND ACCESSORIES IN THE STRAINER SECTION.

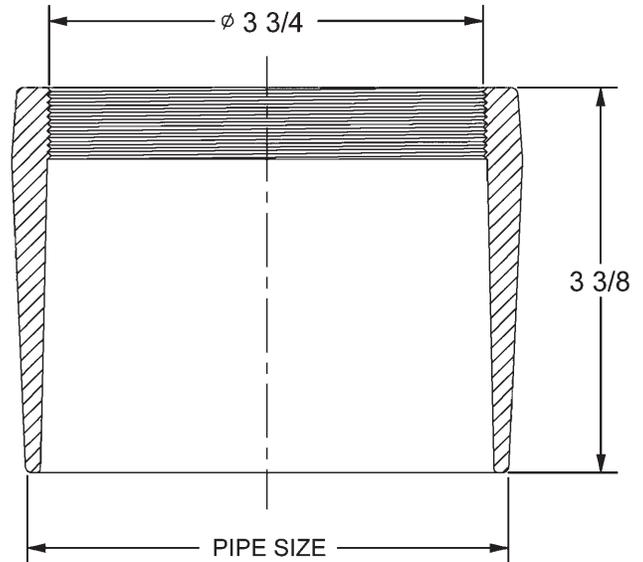


FOR OUTLET TYPE SPECIFY -Z		
TYPE NO.	PIPE SIZE	LBS.
30304-Z	4	3

30500 SERIES BODY WITH TRAP FLUSH-WITH-FLOOR CLEANOUT

APPLICATION
For use with all adjustable strainers. Wide flange anchors drain body in concrete and works in conjunction with the clamp to redirect waste through the drain body if seepage occurs around the strainer. The clamp ring provides a non-puncturing positive bond of the waterproofing membrane to the drain body for applications where floors with standing water are to be sealed off from areas below. The flush-with-the-floor, integral cleanout allows access to the drain line.

SPECIFICATION
JOSAM 30500 Series coated cast iron combined Floor Drain and integral deep drum type "P" trap with double drainage flange, no-hub spigot side outlet, weepholes, bronze integral flush-floor cleanout and threaded to receive a JOSAM adjustable strainer.

THIS DRAIN BODY CAN BE USED WITH ALL STRAINERS AND ACCESSORIES IN THE STRAINER SECTION.

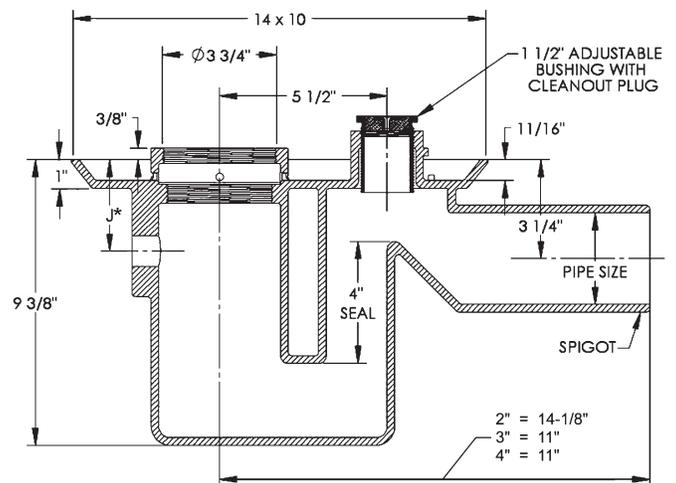

* IPS PRIMER TAPPING (-49) & (-50)
AUX. THREADED INLET (-51) & (-52)

Available Options

- C Bolted Flashing Clamp Device
- 49 3/4" Primer Tap
- 50 1/2" Primer Tap
- 51 1-1/2" Threaded Auxiliary Inlet
- 52 2" Threaded Auxiliary Inlet
- 92 Galvanized Cast Iron Parts

OUTLET:

- Z No-Hub Outlet

FOR OUTLET TYPE SPECIFY -Z			
TYPE NO.	PIPE SIZE	J*	LBS.
30502	2	3	27
30503	3	3-1/2	27
30504	4	4-1/8	29