Less Flange

49340A SERIES

APPLICATION

For use in non-traffic areas where ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10" square grate and medium sump accept moderate to heavy flow and the dome strainer intercepts debris which could block the drain line. Double drainage flange serves as an anchor in the sub-floor and redirects secondary moisture to the waste line. It may also be used with a clamp device to assure a bond between the drain and the flashing or waterproof membrane.

SPECIFICATION


JOSAM 49340A Series square cast iron 8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer and cast iron, non-traffic, acid-resisting, anti-tilting

For Options, See Below

OPTIONS N/A: -VP. -8, -20, -24

TYPE NO.	PIPE SIZE	LBS.
49342A	2	50
49343A	3	50
49344A	4	50

12" SQUARE TOP, 8"

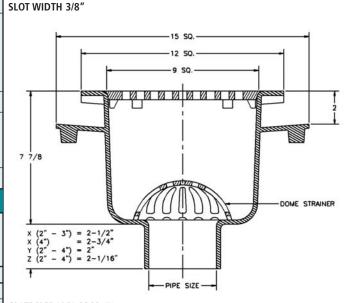

GRATE FREE AREA 26 SQ. IN

FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.

49340A-LF SERIES

APPLICATION

For use in non-traffic areas where ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10" square grate and medium sump accept moderate to heavy flow and the dome strainer intercepts debris which could block the drain line.

SPECIFICATION

JOSAM 49340A-LF Series square cast iron 8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, bottom outlet, aluminum internal dome strainer and cast iron, non-traffic, acid-resisting, anti-tilting grate.

PIPE SIZE


3

4

Chained Grate, NB

OPTIONS N/A: -VP. -8, -20, -24, -C

SLOT WIDTH 3/8"	,



INAIL	LVEE	ANEA	20 3	Q. IIV		

FOR OUTLET	TYPE, SPECIFY	-X, -Y or -Z

49344A-LF **OPTIONS**

-24

TYPE NO.

49342A-LF

49343A-LF



Sediment Bucket (Aluminum) Sediment Bucket (A.R. Finish) Stainless Steel Mesh Bucket Liner Internal Dome Strainer (A.R. Finish) Less Internal Dome Strainer 1/2" Primer Adapter, 88450 Provided Clamp Device, 49340A, 49340A-NB

Inside Caulk Outlet Hub Outlet with Gasket No-Hub Outlet

∇ Specify -31 or -33 Bucket

LBS.

33

33

33



49340A-NB SERIES

APPLICATION


For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10" square grate and medium sump accept moderate to heavy flow and the dome strainer intercepts debris which could block the drain line. Double drainage flange serves as an anchor in the sub-floor and redirects secondary moisture to the waste line. It may also be used with a clamp device to assure a bond between the drain and the flashing or waterproof membrane.

SPECIFICATION

JOSAM 49340A-NB Series square cast iron 8-3/8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer, Nikaloy sanitary sloped rim and Nikaloy, lightduty, anti-tilting, SUPER-FLO® Grate.

TYPE NO.	PIPE SIZE	LBS.	PIPE SIZE -
49342A-NB	2	50	
49343A-NB	3	50	GRATE FREE AREA 35 SQ. IN.
49344A-NB	4	50	FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.
49340A-LI	F-NB SERIES	L	ess Flange, with -NB Nikaloy Traffic Top

with -NB Nikaloy Traffic Top



49340A-LF-NB SERIES

APPLICATION

For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10" square grate and medium sump accept moderate to heavy flow and the dome strainer intercepts debris which could block the drain line.


SPECIFICATION

JOSAM 49340A-LF-NB Series square cast iron 8-3/8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, bottom outlet, aluminum internal dome strainer, Nikaloy sanitary sloped rim and Nikaloy, light-duty, anti-tilting, SUPER-FLO® Grate.

OPTION N/A: -C

TYPE NO.	PIPE SIZE	LBS.
49342A-LF-NB	2	33
49343A-LF-NB	3	33
49344A-LF-NB	4	33

SLOT WIDTH 1/2"



GRATE FREE AREA 35 SQ. IN.

FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.