

## 88100 SERIES

## "P" TRAP

### APPLICATION


For use with any bottom outlet floor drain where a "P" trap with a bottom access cleanout is required to prevent sewer gas or vermin from entering the building.

### SPECIFICATION

JOSAM 88100 Series coated cast iron "P" Trap, spigot inlet and side outlet spigot connection.

### Available Options

- 51 1/2" Flushing Tap
- 60 Bronze Plug

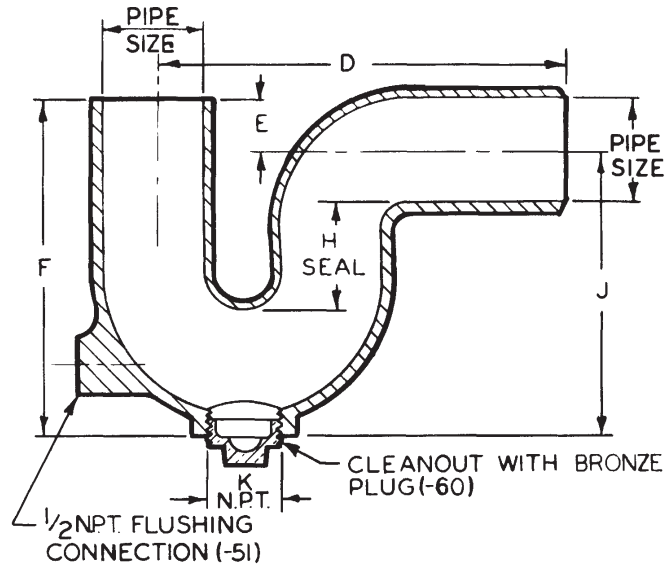

**NOTE:** WHEN (-51) FLUSHING CONNECTION IS USED, A VACUUM BREAKER SHOULD BE INSTALLED SUBJECT TO CODE REQUIREMENTS.

TYPE NO.	PIPE SIZE	D	E	F	H	J	K	LBS.
88102	2	9-5/16	1-5/16	8-1/8	3-1/4	6-13/16	1-1/2	20
88103	3	11-1/2	1-3/4	9-3/4	3	8	2	36
88104	4	15-3/8	2	13-1/4	4-1/8	11-1/4	3	38

## 88210 SERIES

## DEEP SEAL TRAP, FUNNEL INLET

### APPLICATION


For use in hospitals or laboratories to collect indirect waste such as condensation or other drips or spills. This deep seal trap with a bottom access cleanout may be used to prevent sewer gas or vermin from entering the building.

### SPECIFICATION

JOSAM 88210 Series coated cast iron Deep Seal "P" Trap with indirect waste funnel inlet and side outlet threaded connection.

### Available Options

- 8 All Bronze
- 51 1/2" Flushing Tap
- 72 Bronze Bucket

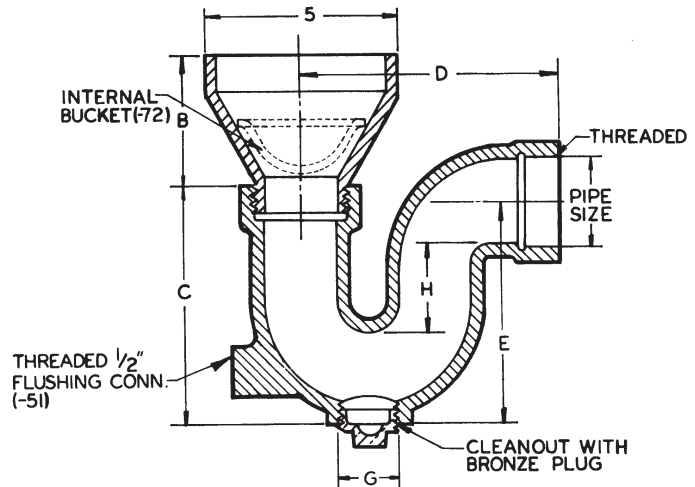

**NOTE:** WHEN (-51) FLUSHING CONNECTION IS USED, A VACUUM BREAKER SHOULD BE INSTALLED SUBJECT TO CODE REQUIREMENTS.

TYPE NO.	PIPE SIZE	B	C	D	E	G	H	LBS.
88212	2	4	6-5/8	6	5-3/4	1	2-3/8	10
88213	3	5	8-1/2	8-1/4	8	2	3-1/4	20