

# JOSAM



PUSH-FIT STAINLESS STEEL DRAINAGE SYSTEM

⚠ WARNING: Cancer and Reproductive Harm - [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

[www.josam.com](http://www.josam.com)

## STAINLESS STEEL DRAINAGE PRODUCTS



Manufactured by **ATT Inox**

As a compliment to Josam Company's Push-Fit Pipe and Fittings, Josam Company also offers a complete line of stainless steel drains. Josam Company offers a complete range of 304 or 316L floor drains, retrofit liners, cleanouts, trench drains and slot and mini channels. All drainage products are available with an optional Push-Fit outlet (PFO) for an easy connection to the Josam Push-Fit Drainage System.

In addition to standard products, Josam Company welcomes inquiries for customized drainage products to suit individual requirements.

For more details on Josam Company's Stainless Steel Drainage System please refer to the product catalog, contact your local Josam representative or visit our website at [www.JOSAM.com](http://www.JOSAM.com).

**⚠ WARNING:** Cancer and Reproductive Harm - [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## Table of Contents

Numerical Index .....	Page 1
Experience .....	Page 2
Stainless Steel Advantages .....	Page 3-4
Josam Push-Fit Advantages.....	Page 5
Push-Fit Stainless Steel Pipe.....	Page 6-7
Push-Fit Stainless Steel Fittings.....	Page 8-18
Gaskets and Clamps .....	Page 19
Pipe Hangers and Lubricant .....	Page 20
Technical Data .....	Page 21-23
Installation Instructions.....	Page 24-27
Chemical Resistance Chart .....	Page 28

 **WARNING:** Cancer and Reproductive Harm - [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## JA SERIES

SERIES NO.	PAGE NO.
JA-3000	19
JA-3002	19
JA-3004	19
JA-3006	19
JA-3008	19
JA-3012	19
JA-3014	19
JA-3020	20
JA-3022	20
JA-3024	20
JA-3026	20
JA-3028	20
JA-3030	20
JA-3032	20
JA-3040	20
JA-3042	20
JA-3044	20
JA-3046	20
JA-3050	20
JA-3052	20
JA-3100	20
JA-4100	20
JA-4101	20
JA-4200	20
JA-4201	20
JA-4300	20
JA-4301	20
JA-4400	20
JA-4401	20
JA-4600	20
JA-4601	20
JA-4602	20
JA-4800	20
JA-4801	20

## JF SERIES

SERIES NO.	PAGE NO.
JF-0188	8
JF-0190	8
JF-0192	8
JF-0460	8
JF-0462	8
JF-0464	8
JF-0468	8
JF-0472	8
JF-0474	8
JF-0604	8
JF-0606	8
JF-0608	8
JF-0610	8
JF-0614	8
JF-0616	8
JF-0650	9
JF-0652	9
JF-0654	9
JF-0656	9
JF-0660	9
JF-0662	9
JF-0720	9
JF-0722	9
JF-0724	9
JF-0726	9
JF-0730	9
JF-0732	9
JF-0810	10
JF-0814	10
JF-0816	10
JF-0818	10
JF-0820	10
JF-0822	10
JF-0902	10
JF-0904	10
JF-0906	10
JF-0908	10
JF-0910	10
JF-0912	10
JF-0914	10
JF-0916	10
JF-0918	10
JF-0920	10
JF-0910	10
JF-0912	10
JF-0914	10
JF-0916	10
JF-0918	10
JF-0920	10

## JF SERIES CONT.

SERIES NO.	PAGE NO.
JF-0926	10
JF-0928	10
JF-0930	10
JF-0934	10
JF-0936	10
JF-0938	10
JF-1312	12
JF-1313	12
JF-1314	12
JF-1315	12
JF-1316	12
JF-1318	12
JF-1319	12
JF-1320	12
JF-1322	12
JF-1324	12
JF-1336	12
JF-1338	12
JF-1342	12
JF-1348	12
JF-1352	12
JF-1354	12
JF-1537	13
JF-1538	13
JF-1540	13
JF-1542	13
JF-1546	13
JF-1548	13
JF-1552	13
JF-1554	13
JF-1556	13
JF-1557	13
JF-1558	13
JF-1602	13
JF-1604	13
JF-1608	13
JF-1610	13
JF-1616	13
JF-1618	13
JF-1626	13
JF-1630	13
JF-1632	13
JF-1636	13
JF-1638	13
JF-1698	14
JF-1700	14
JF-1702	14
JF-1704	14
JF-1706	14
JF-1708	14
JF-1722	14
JF-1726	14
JF-1851	11
JF-1852	11
JF-1854	11
JF-1856	11
JF-1860	11
JF-1862	11
JF-1864	11
JF-1867	11
JF-1874	11
JF-1877	11
JF-1878	11
JF-1920	11
JF-1922	11
JF-1926	11
JF-1928	11
JF-1934	11
JF-1936	11
JF-1944	11
JF-1952	11
JF-1956	11
JF-1960	11
JF-1962	11
JF-2003	14
JF-2004	14
JF-2005	14
JF-2006	14
JF-2007	14
JF-2008	14
JF-2009	14
JF-2010	14
JF-2045	15
JF-2046	15
JF-2048	15
JF-2050	15

## JF SERIES CONT.

SERIES NO.	PAGE NO.
JF-2054	15
JF-2056	15
JF-2138	15
JF-2139	15
JF-2140	15
JF-2142	15
JF-2144	15
JF-2156	15
JF-2168	15
JF-2188	15
JF-2190	15
JF-2192	15
JF-2194	15
JF-2300	16
JF-2302	16
JF-2306	16
JF-2310	16
JF-2312	16
JF-2314	16
JF-2460	16
JF-2462	16
JF-2464	16
JF-2466	16
JF-2480	16
JF-2482	16
JF-2484	16
JF-2486	16
JF-2490	16
JF-2492	16
JF-2506	17
JF-2508	17
JF-2510	17
JF-2512	17
JF-2514	17
JF-6499	17
JF-6500	17
JF-6501	17
JF-6502	17
JF-6504	17
JF-6505	17
JF-6550	17
JF-6552	17
JF-6554	17
JF-6556	17
JF-6560	17
JF-6562	17
JF-6570	18
JF-6572	18
JF-6574	18
JF-6576	18
JF-6580	18
JF-6582	18
JF-9000	18
JF-9002	18
JF-9004	18
JF-9006	18
JF-9010	18
JF-9012	18
JF-9016	18
JF-9018	18
JF-9020	18
JF-9022	18
JF-9026	18
JF-9028	18

## JP SERIES

SERIES NO.	PAGE NO.
JP-EPDM-0100	19
JP-EPDM-0200	19
JP-EPDM-0300	19
JP-EPDM-0400	19
JP-EPDM-0600	19
JP-EPDM-0800	19
JP-EPDM-0100V	19
JP-EPDM-0200V	19
JP-EPDM-0300V	19
JP-FPM-0100	19
JP-FPM-0200	19
JP-FPM-0300	19
JP-FPM-0400	19
JP-FPM-0600	19
JP-FPM-0800	19
JP-0108	6
JP-0116	6
JP-0125	6
JP-0133	6

## JP SERIES CONT.

SERIES NO.	PAGE NO.
JP-0149	6
JP-0166	6
JP-0182	6
JP-0198	6
JP-0208	6
JP-0216	6
JP-0225	6
JP-0233	6
JP-0249	6
JP-0266	6
JP-0282	6
JP-0298	6
JP-0308	6
JP-0316	6
JP-0325	6
JP-0333	6
JP-0349	6
JP-0366	6
JP-0382	6
JP-0398	6
JP-0408	7
JP-0416	7
JP-0425	7
JP-0433	7
JP-0449	7
JP-0466	7
JP-0482	7
JP-0498	7
JP-0608	7
JP-0616	7
JP-0625	7
JP-0633	7
JP-0649	7
JP-0666	7
JP-0682	7
JP-0698	7
JP-0808	7
JP-0816	7
JP-0825	7
JP-0833	7
JP-0849	7
JP-0866	7
JP-0882	7
JP-0898	7

## Josam Company

Throughout its long history, Josam Company has stayed true to the vision of maintaining its reputation as the premier manufacturer of engineered and innovative plumbing and drainage products. Firms worldwide have trusted Josam Company to provide quality and competitive products that meet or exceed their customers' expectations.



Over 25 years ago Josam Company introduced the first Push-Fit stainless steel drainage system to the United States market. Whereas welded stainless steel systems had been available for many years, the advantage of the Josam Push-Fit system is that it enables the installer to obtain all the benefits of stainless steel while reducing the overall cost of installation.

## Chibro



Established in Italy in 1946, Chibro is a leading manufacturer of Push-Fit stainless steel plumbing and drainage systems. Chibro offers a full line of stainless steel pipe, fittings and accessories that provides solutions to various industries including the commercial, marine and industrial segments. Chibro's products are manufactured using innovative technology and in accordance with the internationally recognized ISO 9001 quality management standard.

## Josam Company's Push-Fit Stainless Steel Drainage System

As with all Josam Company products, our mission is to provide superior products that are offered at fair and competitive prices, supported by experience, service and technology.

## Corrosion Resistance



The austenitic chromium nickel steel, used in all Josam pipe and fittings, contains sufficient chromium to form a passive film of chromium oxide which aids in the prevention of surface corrosions. To preserve the chromium oxide layer and further enhance its anti-corrosive nature, all Josam products are acid pickled. When maintained properly, austenitic 316L is resistant to many chemical products and most cleaning agents. For further details, see the Chemical Resistance Chart on page 28.

## Fire and Heat Resistance

Due to the high chromium and nickel alloy content, stainless steel is able to retain its strength at extremely high temperatures and when exposed to fire. Additionally, there are no hazardous substances emitted from stainless steel when exposed to fire.



## Environmentally Friendly

Environmental issues have become important criteria for material selection. All Josam stainless steel products are 100% recyclable. In fact, over 50% of new stainless steel comes from end-of-life products.

## Non-Porous

The significantly lower growth of bacteria on stainless steel than on plastics, cast iron, copper or ordinary steel make it the ideal solution for applications where hygiene is a concern. The smooth surface of stainless steel does not harbor bacteria, and although maintenance is less frequently required, it can be regularly sanitized with suitable chemicals and flushing without fear of corrosion.



## Durability

Traditionally, the selection of piping materials for a given application has been on the basis of the least expensive initial material cost. It has been recognized that the least expensive material cost may not be the most economic long term choice. The life expectancy of stainless steel piping systems is over 50 years.

**Aesthetically Pleasing**

The bright and easily maintained surface of stainless steel provides a modern and attractive appearance. In fact stainless steel has been used for the construction of many well known sculptures, building facades and structures.

**Impact Resistance**

Stainless steel’s ability to resist impacts and shocks is excellent at all temperatures. Hard blows to the pipes may cause surface dents but it is extremely difficult to damage the steel or compromise its performance.



**Thermal Stress Resistance**

Stainless steel has an extremely low coefficient of expansion factor. This benefit allows stainless steel pipes to retain their shapes at all normal temperatures during drainage installations.

**Strength to Weight Ratio**

Stainless steel is considerably lighter in weight than products produced of other materials. The strength of stainless steel allows products to be made thinner and lighter while still providing a strong and durable system.

**Part Numbers**

Part numbers are not intended to show compliance to any product standards.



Josam's Push-Fit joining method results in cost effective installations.

## Push-Fit the Josam Way

Josam's Push-Fit joint is accomplished by lubricating the joint and pushing the spigot and socket together. The result of this quick and easy joining method is a tight seal that has been tested and proven suitable for both gravity and vacuum applications. Additionally, test results have demonstrated that the Josam Push-Fit joint is pressure rated at least 4 times higher than other stainless steel push-fit systems.

## Product and Size Range

Josam Company offers a complete range of pipes, fittings and hanging accessories. Pipe and fittings are available in 1-1/2", 2", 3", 4", 6" and 8" nominal pipe sizes. Pipes are available in 8 different lengths ranging from 0.8 feet to 9.8 feet, allowing for minimal field cuts. A complete aaarange of stainless steel drains are also offered by Josam. For further details, please see Josam Company's Stainless Steel Drainage Product catalog

## Packaging

Each pipe length is individually wrapped in a protective plastic covering. Sizeable pipe shipments from Josam are crated for protection against damage during shipment. Small pipe shipments may be shipped in protective tubes.

## Markings

All Josam products are marked in accordance with applicable standards. Markings will include manufacturer's name and/or registered trademark, the grade of stainless steel, Josam name and part number and UPC®.

## Listings and Approvals

Products meet or exceed the performance requirements of ASME A112.3.1-2007 and IGC 275-10. Most Josam products are IAPMO listed under File #6780. Please refer to the IAPMO website or contact Josam Company for a copy of this listing or state and local code approvals. Additional approvals include Registro Italiano Navale, Lloyd's Register, American Bureau of Shipbuilding, Det Norske Veritas, Bureau Veritas and Russian Maritime Register of Shipping. All manufacturing and quality assurance is in accordance with the internationally recognized ISO 9001 standard


## Labor Savings

The Josam Push-Fit joining method allows joints to be made in a matter of seconds and does not require any tools. Connections are made by lubricating the spigot end and turning it into the socket end. Additionally, due to the fact that stainless steel is lighter in weight, the product is easier to handle and requires less manpower. Considering these two advantages with the life expectancy of the product, the Josam Push-Fit Stainless Steel System is an economical solution for most applications.



[www.josam.com](http://www.josam.com)






### DIMENSION OF SOCKETS

SERIES NUMBER	PIPE SIZE NOM.	A - MIN INSERT DEPTH	D1 (PIPE O.D.)	D2	D3	D4	S
JP-0100	1½"	1.2 (30)	1.7 (42)	1.8 (45)	1.9 (48)	1.8 (45)	.04 (1.0)
JP-0200	2"	1.5 (38)	2.1 (53)	2.2 (56)	2.4 (60)	2.2 (56)	.04 (1.0)
JP-0300	3"	2.2 (55)	2.9 (73)	3 (76)	3.2 (81)	3 (76)	.05 (1.25)
JP-0400	4"	2.8 (70)	4.0 (102)	4.2 (106)	4.5 (114)	4.2 (107)	.05 (1.25)
JP-0600	6"	3.1 (80)	6.3 (159)	6.5 (164)	6.9 (176)	6.6 (168)	.06 (1.5)
JP-0800	8"	4.7 (120)	8.6 (219)	8.8 (224)	9.5 (241)	8.9 (227)	.08 (2.0)


### PUSH-FIT PIPE WITH EPDM GASKETED SOCKET

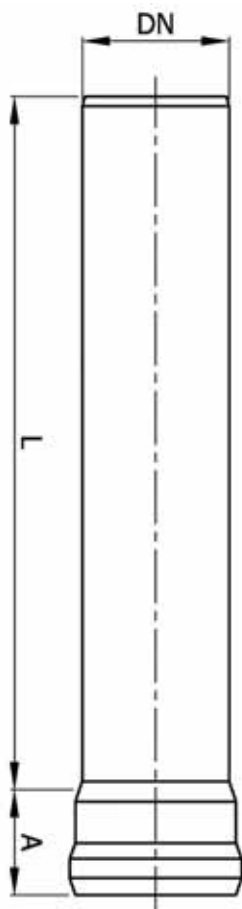


SERIES NUMBER	PIPE SIZE NOM.	A - MIN INSERT DEPTH	L FT.- (MM)	WT LBS.	DN PIPE O.D. IN. - (MM)
JP-0108	1½"	1.2 (30)	0.8 (250)	.75	1.7 (42)
JP-0116	1½"	1.2 (30)	1.6 (500)	1.3	1.7 (42)
JP-0125	1½"	1.2 (30)	2.5 (750)	1.9	1.7 (42)
JP-0133	1½"	1.2 (30)	3.3 (1,000)	2.4	1.7 (42)
JP-0149	1½"	1.2 (30)	4.9 (1,500)	3.5	1.7 (42)
JP-0166	1½"	1.2 (30)	6.6 (2,000)	4.7	1.7 (42)
JP-0182	1½"	1.2 (30)	8.2 (2,500)	6.3	1.7 (42)
JP-0198	1½"	1.2 (30)	9.8 (3,000)	6.7	1.7 (42)
JP-0208	2"	1.5 (38)	0.8 (250)	.93	2.1 (53)
JP-0216	2"	1.5 (38)	1.6 (500)	1.6	2.1 (53)
JP-0225	2"	1.5 (38)	2.5 (750)	2.2	2.1 (53)
JP-0233	2"	1.5 (38)	3.3 (1,000)	3.2	2.1 (53)
JP-0249	2"	1.5 (38)	4.9 (1,500)	4.3	2.1 (53)
JP-0266	2"	1.5 (38)	6.6 (2,000)	5.7	2.1 (53)
JP-0282	2"	1.5 (38)	8.2 (2,500)	6.9	2.1 (53)
JP-0298	2"	1.5 (38)	9.8 (3,000)	8.5	2.1 (53)
JP-0308	3"	2.2 (55)	0.8 (250)	1.6	2.9 (73)
JP-0316	3"	2.2 (55)	1.6 (500)	2.8	2.9 (73)
JP-0325	3"	2.2 (55)	2.5 (750)	4.5	2.9 (73)
JP-0333	3"	2.2 (55)	3.3 (1,000)	5.2	2.9 (73)
JP-0349	3"	2.2 (55)	4.9 (1,500)	7.6	2.9 (73)
JP-0366	3"	2.2 (55)	6.6 (2,000)	10.6	2.9 (73)
JP-0382	3"	2.2 (55)	8.2 (2,500)	12.5	2.9 (73)
JP-0398	3"	2.2 (55)	9.8 (3,000)	14.6	2.9 (73)

## PUSH-FIT PIPE WITH EPDM GASKETED SOCKET (CONT'D)


SERIES NUMBER	PIPE SIZE NOM.	A - MIN INSERT DEPTH	L FT.- (MM)	WT LBS.	DN PIPE O.D. IN. - (MM)
JP-0408	4"	2.8 (70)	0.8 (250)	2.4	4.0 (102)
JP-0416	4"	2.8 (70)	1.6 (500)	4.0	4.0 (102)
JP-0425	4"	2.8 (70)	2.5 (750)	5.6	4.0 (102)
JP-0433	4"	2.8 (70)	3.3 (1,000)	7.2	4.0 (102)
JP-0449	4"	2.8 (70)	4.9 (1,500)	10.5	4.0 (102)
JP-0466	4"	2.8 (70)	6.6 (2,000)	14.1	4.0 (102)
JP-0482	4"	2.8 (70)	8.2 (2,500)	16.5	4.0 (102)
JP-0498	4"	2.8 (70)	9.8 (3,000)	19.8	4.0 (102)
JP-0608	6"	3.1 (80)	0.8 (250)	4.6	6.3 (159)
JP-0616	6"	3.1 (80)	1.6 (500)	7.5	6.3 (159)
JP-0625	6"	3.1 (80)	2.5 (750)	10.6	6.3 (159)
JP-0633	6"	3.1 (80)	3.3 (1,000)	13.7	6.3 (159)
JP-0649	6"	3.1 (80)	4.9 (1,500)	19.8	6.3 (159)
JP-0666	6"	3.1 (80)	6.6 (2,000)	26.1	6.3 (159)
JP-0682	6"	3.1 (80)	8.2 (2,500)	32.2	6.3 (159)
JP-0698	6"	3.1 (80)	9.8 (3,000)	38.2	6.3 (159)
JP-0808	8"	4.7 (120)	0.8 (250)	11.0	8.6 (219)
JP-0816	8"	4.7 (120)	1.6 (500)	15.8	8.6 (219)
JP-0825	8"	4.7 (120)	2.5 (750)	21.6	8.6 (219)
JP-0833	8"	4.7 (120)	3.3 (1,000)	27.2	8.6 (219)
JP-0849	8"	4.7 (120)	4.9 (1,500)	36.6	8.6 (219)
JP-0866	8"	4.7 (120)	6.6 (2,000)	50.5	8.6 (219)
JP-0882	8"	4.7 (120)	8.2 (2,500)	63.1	8.6 (219)
JP-0898	8"	4.7 (120)	9.8 (3,000)	67.7	8.6 (219)

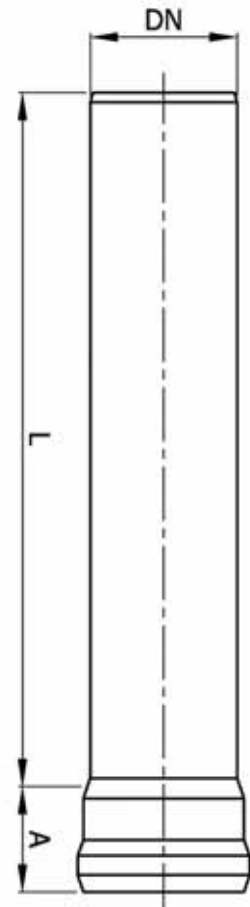

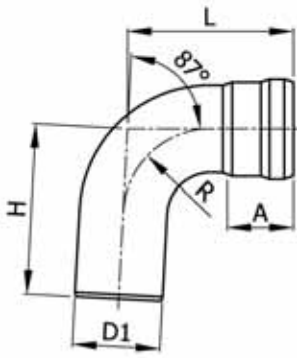


**PUSH-FIT SHORT 1/4 BEND**

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	L	H	R	WT LBS
JF-0188	1½	1.7 (42)	1.2 (30)	3.3 (85)	3.5 (88)	1.7 (42)	.48
JF-0190	2	2.1 (53)	1.5 (38)	4.1 (103)	4.2 (106)	2.1 (53)	.70
JF-0192	3	2.9 (73)	2.2 (55)	5.4 (138)	5.6 (142)	2.9 (73)	1.5

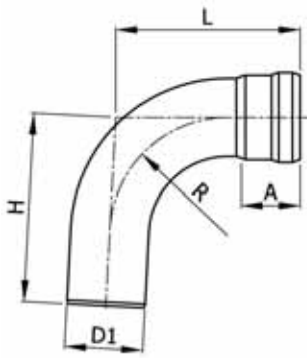

**PUSH-FIT SWEEP 1/4 BEND**

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	L	H	R	WT LBS
JF-0460	1½	1.7 (42)	1.2 (30)	4.0 (102)	4.1 (105)	2.5 (63)	.44
JF-0462	2	2.1 (53)	1.5 (38)	5.1 (130)	5.2 (133)	3.1 (80)	.77
JF-0464	3	2.9 (73)	2.2 (55)	6.8 (172)	6.9 (176)	4.3 (110)	1.7
JF-0468	4	4.0 (102)	2.8 (70)	7.1 (180)	7.3 (186)	4.0 (102)	2.2
JF-0472	6	6.3 (159)	3.1 (80)	9.6 (244)	9.9 (252)	6.3 (159)	7.6
JF-0474	8	8.6 (219)	4.7 (120)	17.4 (443)	17.8 (452)	12.0 (305)	21.2




**PUSH-FIT 1/8 BEND**

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	L	H	R	WT LBS
JF-0604	1½	1.7 (42)	1.2 (30)	2.7 (68)	2.8 (71)	2.5 (63)	.35
JF-0606	2	2.1 (53)	1.5 (38)	3.3 (85)	3.5 (88)	3.1 (80)	.57
JF-0608	3	2.9 (73)	2.2 (55)	4.4 (112)	4.6 (117)	4.3 (110)	1.3
JF-0610	4	4.0 (102)	2.8 (70)	4.7 (120)	5.0 (126)	4.0 (102)	1.7
JF-0614	6	6.3 (159)	3.1 (80)	6.2 (158)	6.5 (166)	6.3 (159)	4.8
JF-0616	8	8.6 (219)	4.7 (120)	10.7 (271)	11.0 (280)	12.0 (305)	13.0


## PUSH-FIT 15 DEGREE BEND

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	L	H	R	WT LBS
JF-0650	1½	1.7 (42)	1.2 (30)	2.0 (51)	2.1 (54)	2.5 (63)	.24
JF-0652	2	2.1 (53)	1.5 (38)	2.4 (62)	2.6 (65)	3.1 (80)	.42
JF-0654	3	2.9 (73)	2.2 (55)	3.2 (82)	3.4 (86)	4.3 (110)	.88
JF-0656	4	4.0 (102)	2.8 (70)	3.8 (96)	4.0 (101)	4.0 (102)	1.2
JF-0660	6	6.3 (159)	3.1 (80)	4.5 (114)	4.8 (121)	6.3 (159)	3.7
JF-0662	8	8.6 (219)	4.7 (120)	6.9 (176)	7.3 (185)	12.0 (305)	8.8




## PUSH-FIT 30 DEGREE BEND

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	L	H	R	WT LBS
JF-0720	1½	1.7 (42)	1.2 (30)	2.3 (59)	2.4 (62)	2.5 (63)	.26
JF-0722	2	2.1 (53)	1.5 (38)	2.9 (73)	3.0 (76)	3.1 (80)	.44
JF-0724	3	2.9 (73)	2.2 (55)	3.9 (98)	4.0 (102)	4.3 (110)	1.0
JF-0726	4	4.0 (102)	2.8 (70)	4.3 (110)	4.5 (115)	4.0 (102)	1.8
JF-0730	6	6.3 (159)	3.1 (80)	5.4 (136)	5.6 (143)	6.3 (159)	3.7
JF-0732	8	8.6 (219)	4.7 (120)	8.7 (221)	9.1 (230)	12.0 (305)	9.4




**PUSH-FIT SANITARY SWEEP TEE**

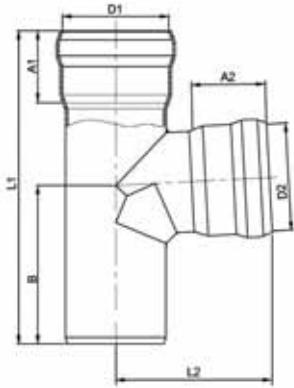

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-0810	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	6.6 (166)	3.2 (81)	3.3 (84)	.64
JF-0814	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	8.3 (210)	3.6 (91)	4.2 (106)	1.2
JF-0816	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	8.3 (210)	4.3 (109)	4.2 (106)	1.3
JF-0818	4X2	4.0 (102)	2.1 (53)	2.8 (70)	1.5 (38)	9.0 (228)	4.1 (105)	4.5 (115)	1.8
JF-0820	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.5 (293)	4.8 (123)	5.8 (147)	2.4
JF-0822	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	11.5 (293)	5.4 (138)	5.8 (147)	1.7

**PUSH-FIT TEE**




SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-0902	1½X1½	1.7 (42)	1.7 (42)	1.2 (30)	1.2 (30)	5.4 (137)	2.6 (67)	2.8 (70)	.48
JF-0904	2X1½	2.1 (53)	1.7 (42)	1.5 (38)	1.2 (30)	6.5 (165)	2.9 (73)	3.3 (84)	.88
JF-0906	2X2	2.1 (53)	2.1 (53)	1.6 (38)	1.6 (38)	6.5 (165)	3.2 (81)	3.3 (84)	.81
JF-0908	3X1½	2.9 (73)	1.7 (42)	2.2 (55)	1.2 (30)	8.2 (209)	3.3 (83)	4.2 (107)	1.3
JF-0910	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.6 (38)	8.2 (209)	3.6 (91)	4.2 (107)	1.2
JF-0912	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	8.2 (209)	4.3 (109)	4.2 (107)	1.7
JF-0914	4X1½	4.0 (102)	1.7 (42)	2.8 (70)	1.2 (30)	8.5 (216)	3.8 (97)	4.4 (111)	1.7
JF-0916	4X2	4.0 (102)	2.1 (53)	2.8 (70)	1.5 (38)	8.5 (216)	4.1 (105)	4.4 (111)	2.1
JF-0918	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.4 (291)	4.8 (123)	5.8 (148)	2.6
JF-0920	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	11.4 (291)	5.4 (138)	5.8 (148)	3.3
JF-0926	6X3	6.3 (159)	2.9 (73)	3.1 (80)	2.2 (55)	13.5 (343)	6.0 (152)	6.9 (175)	5.0
JF-0928	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	13.5 (343)	6.5 (166)	6.9 (175)	5.2
JF-0930	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	15.9 (403)	7.0 (178)	8.1 (205)	6.6
JF-0934	8X4	8.6 (219)	4.0 (102)	4.7 (120)	2.8 (70)	17.4 (441)	7.7 (196)	8.9 (225)	12.7
JF-0936	8X6	8.6 (219)	6.3 (159)	4.7 (120)	3.1 (80)	17.4 (441)	8.2 (208)	8.9 (225)	11.2
JF-0938	8X8	8.6 (219)	8.6 (219)	4.7 (120)	4.7 (120)	19.3 (491)	9.8 (249)	9.8 (250)	22.0




### PUSH-FIT CROSS

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-1851	2X1½	2.1 (53)	1.7 (42)	1.5 (38)	1.2 (30)	6.5 (165)	2.9 (73)	3.3 (84)	1.3
JF-1852	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	6.5 (165)	3.2 (81)	3.3 (84)	1.2
JF-1854	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	7.6 (192)	3.6 (91)	3.9 (98)	1.6
JF-1856	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	8.2 (209)	4.3 (109)	4.2 (107)	2.0
JF-1860	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.5 (291)	4.8 (123)	5.8 (148)	3.4
JF-1862	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	11.5 (291)	5.4 (138)	5.8 (148)	4.0
JF-1864	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	13.5 (343)	6.5 (166)	6.9 (175)	5.9
JF-1867	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	15.9 (403)	7.0 (178)	8.1 (205)	7.0
JF-1874	8X4	8.6 (219)	4.0 (102)	4.7 (120)	2.8 (70)	17.4 (441)	7.7 (196)	8.9 (225)	11.0
JF-1877	8X6	8.6 (219)	6.3 (159)	4.7 (120)	3.1 (80)	17.4 (441)	8.2 (208)	8.9 (225)	12.7
JF-1878	8X8	8.6 (219)	8.6 (219)	4.7 (120)	4.7 (120)	19.3 (491)	9.8 (249)	9.8 (250)	20.2

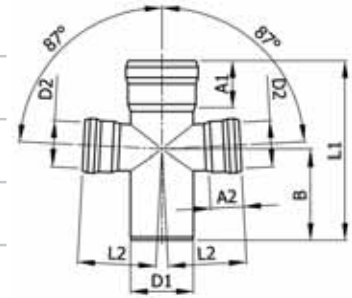


### PUSH-FIT OFFSET DOUBLE TEE

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-1920	2X1½	2.1 (53)	1.7 (42)	1.5 (38)	1.2 (30)	6.5 (165)	2.9 (73)	3.3 (84)	.90
JF-1922	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	6.5 (165)	3.2 (81)	3.3 (84)	.77
JF-1926	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	7.6 (192)	3.6 (91)	3.9 (98)	1.6
JF-1928	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	8.2 (209)	4.3 (109)	4.2 (107)	2.0
JF-1934	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.5 (291)	4.8 (123)	5.8 (148)	3.2
JF-1936	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	11.5 (291)	5.4 (138)	5.8 (148)	4.0
JF-1944	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	13.5 (343)	6.5 (166)	6.9 (175)	5.4
JF-1952	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	15.9 (403)	7.0 (178)	8.1 (205)	7.0
JF-1956	8X4	8.6 (219)	4.0 (102)	4.7 (120)	2.8 (70)	17.4 (441)	7.7 (196)	8.9 (225)	11.2
JF-1960	8X6	8.6 (219)	6.3 (159)	4.7 (120)	3.1 (80)	17.4 (441)	8.2 (208)	8.9 (225)	12.1
JF-1962	8X8	8.6 (219)	8.6 (219)	4.7 (120)	4.7 (120)	19.3 (491)	9.8 (249)	9.8 (250)	20.2




**PUSH-FIT 45 DEGREE WYE**

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-1312	1½X1½	1.7 (42)	1.7 (42)	1.2 (30)	1.2 (30)	6.1 (155)	3.9 (100)	2.2 (55)	.60
JF-1313	2X1½	2.1 (53)	1.7 (42)	1.5 (38)	1.2 (30)	7.8 (198)	5.8 (148)	2.6 (65)	.88
JF-1314	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	7.8 (198)	5.2 (133)	2.6 (65)	1.0
JF-1315	3X1½	2.9 (73)	1.7 (42)	2.2 (55)	1.2 (30)	8.1 (205)	5.7 (145)	2.4 (60)	1.3
JF-1316	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	9.1 (230)	6.1 (155)	3.0 (75)	1.3
JF-1318	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	10.0 (255)	6.7 (170)	3.3 (85)	2.0
JF-1319	4X1½	4.0 (102)	1.7 (42)	2.8 (70)	1.2 (30)	9.8 (250)	7.3 (185)	2.6 (65)	1.7
JF-1320	4X2	4.0 (102)	2.1 (53)	2.8 (70)	1.5 (38)	10.6 (270)	7.7 (195)	3.0 (75)	2.1
JF-1322	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.8 (300)	8.3 (210)	3.5 (90)	2.6
JF-1324	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	13.2 (335)	8.9 (225)	4.3 (110)	3.4
JF-1336	6X3	6.3 (159)	2.9 (73)	3.1 (80)	2.2 (55)	13.2 (335)	10.0 (255)	3.1 (80)	5.0
JF-1338	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	14.6 (370)	11.1 (281)	3.5 (89)	5.2
JF-1342	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	18.1 (460)	12.6 (320)	5.5 (140)	8.5
JF-1348	8X4	8.6 (219)	4.0 (102)	4.7 (120)	2.8 (70)	17.5 (445)	13.6 (345)	3.9 (100)	12.7
JF-1352	8X6	8.6 (219)	6.3 (159)	4.7 (120)	3.1 (80)	21.3 (540)	15.4 (390)	5.9 (150)	11.2
JF-1354	8X8	8.6 (219)	8.6 (219)	4.7 (120)	4.7 (120)	24.4 (620)	16.9 (430)	7.5 (190)	22.0




## PUSH-FIT 45 DEGREE DOUBLE WYE

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-1537	2X1½	2.1 (53)	1.7 (42)	1.5 (38)	1.2 (30)	7.8 (198)	5.8 (148)	2.6 (65)	.77
JF-1538	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	7.8 (198)	5.2 (133)	2.6 (65)	1.17
JF-1540	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	9.1 (230)	6.1 (155)	3.0 (75)	1.8
JF-1542	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	10.0 (255)	6.7 (170)	3.3 (85)	2.2
JF-1546	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.8 (300)	8.3 (210)	3.5 (90)	3.3
JF-1548	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	13.2 (335)	8.9 (225)	4.3 (110)	3.4
JF-1552	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	14.6 (370)	11.1 (281)	3.5 (89)	6.6
JF-1554	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	18.1 (460)	12.6 (320)	5.5 (140)	8.5
JF-1556	8X4	8.6 (219)	4.0 (102)	4.7 (120)	2.8 (70)	17.5 (445)	13.6 (345)	3.9 (100)	12.4
JF-1557	8X6	8.6 (219)	6.3 (159)	4.7 (120)	3.1 (80)	21.3 (540)	15.4 (390)	5.9 (150)	15.0
JF-1558	8x8	8.6 (219)	8.6 (219)	4.7 (120)	4.7 (120)	24.4 (620)	16.9 (430)	7.5 (190)	22.0



## PUSH-FIT 90 DEGREE OFFSET DOUBLE WYE


SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	B	WT LBS
JF-1602	2X1½	2.1 (53)	1.7 (42)	1.5 (38)	1.2 (30)	6.1 (168)	4.6 (118)	2.0 (50)	.77
JF-1604	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	7.4 (188)	5.2 (133)	2.6 (65)	1.0
JF-1608	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	9.1 (230)	6.1 (155)	3.0 (75)	1.9
JF-1610	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	10.0 (255)	6.7 (170)	3.3 (85)	2.2
JF-1616	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.8 (300)	8.3 (210)	3.5 (90)	4.2
JF-1618	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	13.2 (335)	8.9 (225)	4.3 (110)	5.3
JF-1626	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	14.6 (370)	10.8 (275)	3.7 (95)	6.6
JF-1630	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	18.1 (460)	12.6 (320)	5.5 (140)	10.8
JF-1632	8X4	8.6 (219)	4.0 (102)	4.7 (120)	2.8 (70)	17.5 (445)	13.6 (345)	3.9 (100)	13.3
JF-1636	8X6	8.6 (219)	6.3 (159)	4.7 (120)	3.1 (80)	21.3 (540)	15.4 (390)	5.9 (150)	18.0
JF-1638	8x8	8.6 (219)	8.6 (219)	4.7 (120)	4.7 (120)	24.4 (620)	16.9 (430)	7.5 (190)	26.0






**PUSH-FIT COMBINATION WYE AND 1/8 BEND**

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A1 - MIN INSERT DEPTH	A2 - MIN INSERT DEPTH	L1	L2	H	B	WT LBS
JF-1698	2X2	2.1 (53)	2.1 (53)	1.5 (38)	1.5 (38)	7.8 (198)	5.5 (140)	5.2 (131)	2.6 (65)	1.0
JF-1700	3X2	2.9 (73)	2.1 (53)	2.2 (55)	1.5 (38)	9.1 (230)	5.9 (150)	5.9 (151)	3.0 (75)	1.5
JF-1702	3X3	2.9 (73)	2.9 (73)	2.2 (55)	2.2 (55)	10.0 (255)	7.4 (187)	6.9 (174)	3.3 (85)	2.1
JF-1704	4X2	4.0 (102)	2.1 (53)	2.8 (70)	1.5 (38)	10.6 (270)	6.5 (165)	6.5 (166)	3.0 (75)	2.2
JF-1706	4X3	4.0 (102)	2.9 (73)	2.8 (70)	2.2 (55)	11.8 (300)	8.0 (202)	7.6 (194)	3.5 (90)	2.9
JF-1708	4X4	4.0 (102)	4.0 (102)	2.8 (70)	2.8 (70)	13.2 (335)	9.5 (242)	9.1 (232)	4.3 (110)	3.7
JF-1722	6X4	6.3 (159)	4.0 (102)	3.1 (80)	2.8 (70)	14.6 (370)	10.7 (271)	9.4 (240)	3.5 (89)	6.6
JF-1726	6X6	6.3 (159)	6.3 (159)	3.1 (80)	3.1 (80)	18.1 (460)	13.7 (347)	13.0 (329)	5.5 (140)	9.2




**PUSH-FIT CONCENTRIC METRIC ADAPTER**

SERIES NUMBER	PIPE SIZE MM X MM	D1 PIPE O.D.	D2 PIPE O.D.	L	WT LBS
JF-2003	53X50	53	50	98	.28
JF-2004	50X53	50	53	96	.29
JF-2005	73X75	73	75	137	.65
JF-2006	75X73	75	73	137	.64
JF-2007	102X110	102	110	190	1.1
JF-2008	159X160	159	160	210	2.6
JF-2009	219X200	219	200	300	5.3
JF-2010	219X250	219	250	315	5.3




## PUSH-FIT ACCESS PIPE

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	D3	A - MIN INSERT DEPTH	L	M	B	WT LBS
JF-2045	1½	1.7 (42)	1.7 (42)	2.8 (70)	1.2 (30)	5.4 (137)	M6	2.8 (70)	.77
JF-2046	2	2.1 (53)	2.1 (53)	3.1 (80)	1.5 (38)	6.5 (165)	M6	3.3 (84)	1.1
JF-2048	3	2.9 (73)	2.9 (73)	4.1 (105)	2.2 (55)	8.9 (225)	M8	4.5 (115)	2.0
JF-2050	4	4.0 (102)	3.5 (89)	4.9 (125)	2.8 (70)	11.5 (291)	M8	5.8 (148)	3.1
JF-2054	6	6.3 (159)	5.2 (133)	6.5 (165)	3.1 (80)	15.9 (403)	M8	8.1 (205)	7.0
JF-2056	8	8.6 (219)	5.2 (133)	6.5 (165)	4.7 (120)	17.4 (441)	M8	8.9 (225)	12.1




## PUSH-FIT CONCENTRIC REDUCER

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A - MIN INSERT DEPTH	L	B	WT LBS
JF-2138	2X1½	1.7 (42)	2.1 (53)	1.2 (30)	4.7 (120)	2.4 (62)	.42
JF-2139	3X1½	1.7 (42)	2.9 (73)	1.2 (30)	5.7 (145)	2.6 (65)	.51
JF-2140	3X2	2.1 (53)	2.9 (73)	1.5 (38)	5.5 (140)	2.6 (65)	.57
JF-2142	4X2	2.1 (53)	4.0 (102)	1.5 (38)	7.1 (180)	3.3 (85)	1.1
JF-2144	4X3	2.9 (73)	4.0 (102)	2.2 (55)	7.5 (190)	3.3 (85)	1.3
JF-2156	6X4	4.0 (102)	6.3 (159)	2.8 (70)	9.8 (250)	3.5 (90)	2.5
JF-2168	8X6	6.3 (159)	8.6 (219)	3.1 (80)	11.8 (300)	5.1 (130)	6.1




## PUSH-FIT ECCENTRIC REDUCER

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2 PIPE O.D.	A - MIN INSERT DEPTH	L	B	WT LBS
JF-2188	2X1½	1.7 (42)	2.1 (53)	1.2 (30)	5.1 (130)	2.2 (55)	.42
JF-2190	3X2	2.1 (53)	2.9 (73)	1.5 (38)	6.3 (160)	2.6 (65)	.79
JF-2192	4X2	2.1 (53)	4.0 (102)	1.5 (38)	7.5 (190)	3.1 (80)	1.5
JF-2194	4X3	2.9 (73)	4.0 (102)	2.2 (55)	7.9 (200)	3.1 (80)	1.8




### PUSH-FIT FEMALE THREADED ADAPTER




SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	G	L	WT LBS
JF-2300	1½"X1"	1.7 (42)	1"	5.5 (140)	.81
JF-2302	1½"X1¼"	1.7 (42)	1¼"	5.5 (140)	.68
JF-2306	1½"X1½"	1.7 (42)	1½"	5.5 (140)	.77
JF-2310	2"X1¼"	2.1 (53)	1¼"	5.5 (140)	.86
JF-2312	2"X1½"	2.1 (53)	1½"	5.5 (140)	.75
JF-2314	2"X2"	2.1 (53)	2"	5.5 (140)	1.2

### PUSH-FIT EXPANSION PLUG



SERIES NUMBER	PIPE SIZE NOM.	D1	D2	WT LBS
JF-2460	1½	1.7 (43)	1.9 (47)	.18
JF-2462	2	2.1 (54)	2.3 (58)	.26
JF-2464	3	2.9 (74)	3.1 (79)	.44
JF-2466	4	4.1 (105)	4.3 (110)	1.0


### PUSH-FIT BLIND PLUG



SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2	B	WT LBS
JF-2480	1½	1.7 (42)	2.0 (50)	1.2 (30)	.15
JF-2482	2	2.1 (53)	2.4 (60)	1.5 (38)	.22
JF-2484	3	2.9 (73)	3.1 (80)	2.2 (55)	.46
JF-2486	4	4.0 (102)	4.4 (112)	2.8 (70)	1.1
JF-2490	6	6.3 (159)	6.9 (174)	3.1 (80)	1.9
JF-2492	8	8.6 (219)	9.4 (239)	4.7 (120)	4.5

## PUSH-FIT P-TRAP


SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	B	C	F	WT LBS
JF-2506	1½	1.7 (42)	1.2 (30)	3.0 (76)	4.1 (105)	6.8 (172)	1.0
JF-2508	2	2.1 (53)	1.5 (38)	3.6 (92)	5.2 (133)	8.3 (212)	1.2
JF-2510	3	2.9 (73)	2.2 (55)	4.7 (120)	7.2 (183)	11.3 (288)	2.7
JF-2512	4	4.0 (102)	2.8 (70)	6.3 (161)	10.2 (260)	15.4 (390)	5.0
JF-2514	6	6.3 (159)	3.1 (80)	9.2 (235)	15.6 (398)	22.0 (558)	11.2



\*\*-CO option (P-Trap with Cleanout available upon request)

## PUSH-FIT DOUBLE COUPLING

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	A - MIN INSERT DEPTH	L	WT LBS
JF-6499	1½	1.7 (42)	1.2 (30)	3.3 (84)	.26
JF-6500	2	2.1 (53)	1.5 (38)	3.7 (94)	.46
JF-6501	3	2.9 (73)	2.2 (55)	5.3 (135)	.73
JF-6502	4	4.0 (102)	2.8 (70)	7.1 (180)	1.3
JF-6504	6	6.3 (159)	3.1 (80)	7.9 (200)	4.1
JF-6505	8	8.6 (219)	4.7 (120)	11.4 (290)	7.2




## PUSH-FIT SLIP COUPLING

SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	L	WT LBS
JF-6550	1½	1.7 (42)	5.6 (142)	.40
JF-6552	2	2.1 (53)	6.9 (176)	.62
JF-6554	3	2.9 (73)	10.0 (255)	.57
JF-6556	4	4.0 (102)	13.1 (334)	2.4
JF-6560	6	6.3 (159)	18.6 (473)	5.5
JF-6562	8	8.6 (219)	26.5 (673)	12.0




### PUSH-FIT LONG EXPANSION SOCKET




SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	B	L	WT LBS
JF-6570	1-1/2"	1.7 (42)	2.8 (70)	4.7 (120)	.31
JF-6572	2"	2.1 (53)	3.7 (95)	6.1 (155)	.51
JF-6574	3"	2.9 (73)	5.5 (140)	8.1 (205)	1.1
JF-6576	4"	4.0 (102)	5.9 (150)	9.4 (240)	2.1
JF-6580	6"	6.3 (159)	6.7 (170)	11.2 (285)	3.3
JF-6582	8"	8.6 (219)	9.8 (250)	15.7 (400)	10.6

### PUSH-FIT 150# FEMALE FLANGE ADAPTER



SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2	D3	D4	A - MIN INSERT DEPTH	L	L1	WT LBS
JF-9000	1-1/2"	1.7 (42)	3.9 (98)	.63 (16)	5.0 (127)	1.2 (30)	2.8 (71)	.69 (18)	4.2
JF-9002	2"	2.1 (53)	4.7 (121)	.75 (19)	6.0 (152)	1.5 (38)	3.1 (80)	.75 (19)	5.1
JF-9004	3"	2.9 (73)	5.5 (140)	.75 (19)	7.0 (178)	2.2 (55)	4.0 (101)	.87 (22)	7.9
JF-9006	4"	4.0 (102)	7.5 (191)	.75 (19)	9.0 (229)	2.8 (70)	4.6 (118)	.94 (24)	13.2
JF-9010	6"	6.3 (159)	9.5 (241)	.87 (22)	11.0 (279)	3.1 (80)	5.2 (131)	1.0 (25)	19.8
JF-9012	8"	8.6 (219)	11.8 (299)	.87 (22)	13.5 (343)	4.7 (120)	6.9 (175)	1.1 (29)	29.7

### PUSH-FIT 150# MALE FLANGE ADAPTER



SERIES NUMBER	PIPE SIZE NOM.	D1 PIPE O.D.	D2	D3	D4	L	L1	WT LBS
JF-9016	1-1/2"	1.7 (42)	3.9 (98)	.63 (16)	5.0 (127)	2.5 (65)	.69 (18)	4.2
JF-9018	2"	2.1 (53)	4.7 (121)	.75 (19)	6.0 (152)	3.0 (76)	.75 (19)	5.1
JF-9020	3"	2.9 (73)	5.5 (140)	.75 (19)	7.0 (178)	3.9 (99)	.87 (22)	7.9
JF-9022	4"	4.0 (102)	7.5 (191)	.75 (19)	9.0 (229)	5.2 (131)	.94 (24)	13.2
JF-9026	6"	6.3 (159)	9.5 (241)	.87 (22)	11.0 (279)	6.8 (173)	1.0 (25)	19.8
JF-9028	8"	8.6 (219)	11.8 (299)	.87 (22)	13.5 (343)	8.1 (206)	1.1 (29)	29.7





## PUSH-FIT EPDM GASKETS

### GRAVITY APPLICATIONS

SERIES NUMBER	PIPE SIZE NOM.	L
JP-EPDM-0100	1½	.59 (15)
JP-EPDM-0200	2	.71 (18)
JP-EPDM-0300	3	.83 (21)
JP-EPDM-0400	4	1.1 (27)
JP-EPDM-0600	6	1.4 (35)
JP-EPDM-0800	8	2.0 (50)


### VACUUM APPLICATIONS

SERIES NUMBER	PIPE SIZE NOM.	L
JP-EPDM-0100V	1½	1.4 (35)
JP-EPDM-0200V	2	1.7 (43)
JP-EPDM-0300V	3	2.4 (60)




## PUSH-FIT FPM GASKETS

SERIES NUMBER	PIPE SIZE NOM.	L
JP-FPM-0100	1½	.59 (15)
JP-FPM-0200	2	.71 (18)
JP-FPM-0300	3	.83 (21)
JP-FPM-0400	4	1.1 (27)
JP-FPM-0600	6	1.4 (35)
JP-FPM-0800	8	2.0 (50)




## PUSH-FIT JOINT CLAMP


SERIES NUMBER	PIPE SIZE NOM.
JA-3002	1½
JA-3004	2
JA-3006	3
JA-3008	4
JA-3012	6
JA-3014	8

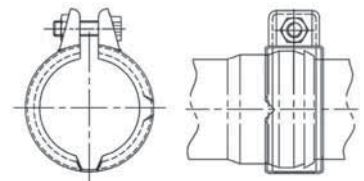

## SWAY BRACE

SERIES NUMBER
JA-3000



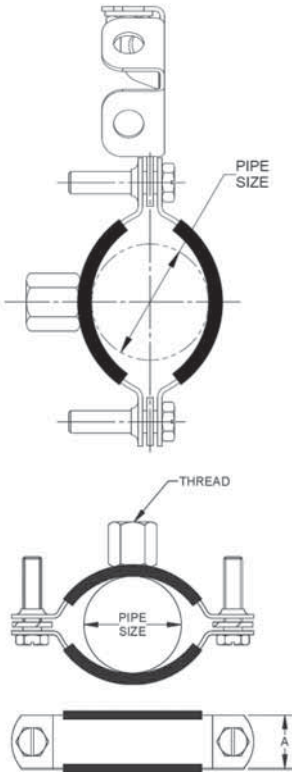

**ADJUSTABLE PIPE HANGER**


SERIES NUMBER	PIPE SIZE NOM.
JA-3020	1½
JA-3022	2
JA-3024	3
JA-3026	4
JA-3030	6
JA-3032	8

**NON-ADJUSTABLE PIPE HANGER**

SERIES NUMBER	PIPE SIZE NOM.
JA-3040	1½
JA-3042	2
JA-3044	3
JA-3046	4
JA-3050	6
JA-3052	8


**PIPE LUBRICANT**

SERIES NUMBER
JA-3100



**TRANSITION COUPLING**

SERIES NUMBER	PUSH-FIT ø	PIPE	SHIELD
JA-4100	1-1/2"	1-1/2" Copper	
JA-4101	1-1/2"	1-1/2" NH/Sch40/Glass	
JA-4200	2"	2" NH/SV/Copper	
JA-4201	2"	2" NH/SV/XH/Sch40/Glass	X
JA-4300	3"	3" NH/SV/XH/Sch40/Glass	X
JA-4301	3"	3" Copper	X
JA-4400	4"	4" NH/SV/XH/Sch40/Glass	X
JA-4401	4"	4" Copper	
JA-4600	6"	6" NH/SV/XH/Sch40/Glass	X
JA-4601	6"	6" Copper	X
JA-4602	6"	6" Glass	X
JA-4800	8"	8" NH/SV/Sch40	X
JA-4801	8"	8" Copper	X

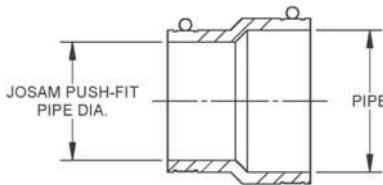

\*Each coupling is provided with an elastomeric PVC coupling and 300 Series SS shield where noted



**Material Type**

Josam Push-Fit pipe and fittings are available in type 316L austenitic stainless steel. All seam welded pipes are acid pickled to provide the best consistent corrosion resistant surface and uniform aesthetic appearance.

Type 304SS is used for some accessories and can be offered for special applications. Properties for both 304 and 316L stainless steel are shown below.

CHEMICAL COMPOSITION	316L		304	
CARBON (C%)	0.030	MAX	0.080	MAX
MANGANESE (MN%)	2.00	MAX	2.00	MAX
PHOSPHOR (P%)	0.045	MAX	0.045	MAX
SULFUR (S%)	0.030	MAX	0.030	MAX
SILICON (SI%)	0.75	MAX	0.75	MAX
CHROMIUM (CR%)	16.0 - 18.0		18.0 - 20.0	
NICKEL (NI%)	10.0 - 14.0		8.0 - 10.5	
MOLYBDENUM (MO%)	2.0 - 3.0		-	
NITROGEN (N%)	0.1	MAX	0.1	MAX

PHYSICAL PROPERTIES - UNANNEALED	316L	304	UNITS
SPECIFIC GRAVITY	0.288	0.285	LB/IN <sup>3</sup>
MELTING POINT	2552	2552	°F
EXPANSION COEFFICIENT	8.9X10 <sup>6</sup>	9.6X10 <sup>6</sup>	32 - 212 °F
THERMAL CONDUCTIVITY	9.4	9.4	BTU/FT/ °F TO 212 °F
ELECTRICAL RESISTIVITY	740	780	MICROHM-MM AT 68 °F
SPECIFIC HEAT	0.12	0.12	BTU/LB 32 - 212 °F



MECHANICAL PROPERTIES	316L	304	UNITS
TENSILE STRENGTH	70,000	70,000	PSI MIN.
YIELD STRENGTH	25,000	25,000	PSI MIN.
MODULES OF ELASTICITY	28	28	MPSI
ELONGATION	30	30	% MIN.
HARDNESS BRINELL	217	217	HB MAX.

### Thermal Expansion

The expansion coefficient of stainless steel is very low. A 39.4” (1 meter) pipe expands approximately 0.063 inches (1.6 mm) with a change in temperature of 212 degrees F (100 degrees C).

The design of a Josam Push-Fit drainage system can be accomplished with no special consideration or compensating material for expansion. The pipes are also suitable for installation in concrete due to the similar expansion factor (0.0165 mm/m/degree C).

### Sealing Rings

Standard Josam Push-Fit gaskets are made of Ethylene Propylene Diene Monomer rubber, commonly known as EPDM. Fluorine rubber gaskets, commonly known as FPM, are also available as an option. The shape of the gasket is specifically designed to fit the socket and designed for an engineered water tight joint. When a pipe is inserted into the socket, the gasket is compressed between the socket and outer pipe surface to create a positive seal. As the internal pressure increases, the pressure of the seal against the joint also increases and the joint remains tight. The gasket is designed with a visible lip around the entire perimeter of the socket. This lip holds the seal in proper position and is an indicator of a properly made joint after assembly.

Longer shaped gaskets are required and available from Josam Company for vacuum drainage application. Please advise Josam when pipe systems will be used for vacuum drainage to ensure proper gaskets are furnished.

**Tightness**

Push-Fit pipes and fittings create a joint that is suitable for use in typical gravity or vacuum drainage systems. The maximum pressure capacities listed below are based on testing in a lab environment with pipes rigidly fixed. Test pressures illustrate the quality of the gasket material and system design. Pipe and fittings are not intended for installation in pressure applications. Pipe installations must be fixed according to Josam's recommendations in order to meet test pressure requirements. Additional fixing requirements may be necessary for handling elevated pressures. Contact Josam Company with any questions or regarding specific pressure requirements.


**Gravity**

Pipe sizes 1- 1/2" to 5" nominal 10 bar (145 psi)  
 Pipe sizes 6" to 8" nominal 5 bar (72.5 psi)

**Vacuum**

1-1/2" to 3" nominal -0.96 bar (28 in. Hg)

Vacuum systems typically use only 1-1/2" to 3" nominal pipe sizes.

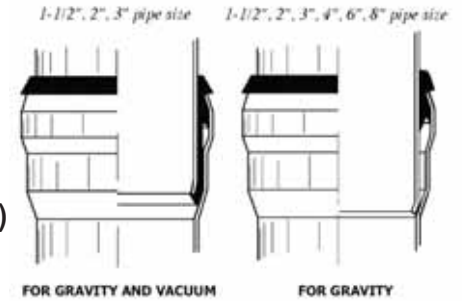

**RUBBER TYPES**

INTERNATIONAL DESIGNATION	EPDM	FPM
RUBBER TYPE	ETHYLENE PROPENE	FLOURINE (VITON)
NOMINAL HARDNESS IRHD	60	70
COLOR	BLACK	GREEN
TENSILE STRENGTH MPA	9.5	13
ELONGATION AFTER FRACTURE %	450	225
MAX. TEMPERATURE RANGE	120°C/248°F	300°C/572°F



**RESISTANCE**

WEARABILITY	EPDM	FPM
RESISTANCE TO MINERAL OIL	D	A
RESISTANCE TO VEGETABLE OIL	B	A
RESISTANCE TO BENZENE/PETROL	D	A
RESISTANCE TO AROMATIC COMPOUNDS AND HYDROCARBONS	D	A
RESISTANCE TO KETONES	A	D
RESISTANCE TO ORDINARY DILUTED ACIDS AND ALKALINES	A	A
RESISTANCE TO OZONE AND WEATHER STRESSES	A	A
RESISTANCE TO AIR DIFFUSION	A	A

A = VERY GOOD SERVICE    B = MODERATE SERVICE  
 C = LIMITED OR VARIABLE SERVICE    D = UNSATISFACTORY

**CAUTION!**  
 The information on this chart is intended for use as reference information only. Specific application factors including temperature and concentration may affect suitability and it is recommended that the user test for compatability.

### Cutting the Pipes

Josam Push-Fit pipes can be cut to desired length by various means using manual and electric cutters. The pipes should be cut square and the exterior surface must be free of burrs and slightly rounded or beveled. Fittings may not be cut.

1. Select appropriate pipe lengths. Josam offers 8 different pipe lengths to minimize cuts and waste. Project take-offs should reflect a variety of pipe lengths to suit the pipe layout of the project application.
2. Cut pipe lengths as necessary using the closest pipe length available. In some instances multiple pipe sections may reduce the amount of pipe to be cut.
3. Cut pipes square using either a Josam recommended pipe cutter, a circular saw or a tube style pipe cutter with an appropriate blade or cutting wheel.
4. If using a cutter that does not deburr the pipe, remove any burrs from the exterior surface of the pipe prior to making a joint. A slight bevel on the outside edge of the pipe end will facilitate easy insertion into the socket.
5. Contact Josam Company for recommended pipe cutters.

### Assembling a Josam Push-Fit Joint

The Josam Push-Fit socket and spigot joint is designed to be easily assembled and adjusted without the need of any special tools. Using lubricant available from Josam will allow the pipe material to be inserted into the socket and seal. Steps for making a joint are illustrated below.



1. Insert the seal into the socket if it is not already installed. The seal and pipe should be clean. If necessary remove the seal and rinse with water to remove any dirt.



- a. To insert the seal, squeeze and fold the ring into a heart shape. Press the top lip firmly into the socket with the lip hooking on the top edge.



- b. Allow the seal to unfold and press the lip tightly against the entire perimeter of the socket

## Assembling a Josam Push-Fit Joint (Cont'd)



2. Apply a small amount of lubricant (item 40930) to the inside of the sealing ring.



3. Before inserting a spigot end into the socket, it is recommended to mark the insertion depth on the spigot. See insertion Depth 'A' from chart on page 6.

4. Insert the spigot into the socket with a slight turning motion. Push the pipe completely into the socket and then back out approximately 1/4". The lip of the gasket should be visible around the perimeter of the joint.

**Note:** Make adjustments as soon as possible. After the lubricant dries the parts may be difficult to disassemble. If necessary heat the joint with a gas torch to help loosen the joint for disassembly. If heated in this manner, the seal should be replaced prior to reassembling.

## Hanging and Bracing the Pipe System

The Josam Push-Fit pipe systems should be supported to prevent the pipe joint from pushing apart. Use the following guidelines for fixing pipes.

- Josam Company recommends the use of their hangers for properly supporting the system. See page 20.
- Josam hangers or similar split ring hangers should be used to limit or prevent axial movement.
- Alternative hangers must be stainless steel or lined with rubber or non metallic material to protect against galvanic corrosion.
- Secure pipe penetrations to prevent vertical movement.
- Brace end of pipe runs and changes in direction to prevent the pipes from pushing apart. Utilize joint locking clamps and sway braces as necessary.

The rods and hanger spacing must be sufficient to support the weight of the pipes filled with water.

### WEIGHTS OF 39.4" (1 METER) PIPE FILLED WITH WATER.

PIPE SIZE	WEIGHT LBS. (KG)
1½"	5.1 (2.3)
2"	7.3 (3.3)
3"	13.4 (6.1)
4"	24.0 (10.9)
6"	55.0 (25.0)
8"	103.4 (47.0)

## Additional Bracing

Sway braces should be used for limiting movement of the fixed pipes at intervals of 30-50 ft (10-15 meters) and changes in direction and end of lines as necessary to prevent pipes from pushing apart.

The Josam Push-Fit system must be properly supported by the hanger system to prevent the pipes from pushing apart. Ends of runs and changes in directions must be braced! If properly supported the Josam Push-Fit joint will handle considerable pressure when properly supported (see maximum tested pressures on page 23).

## Underground installations

316L pipe systems are suitable for direct burial underground in most areas. Soil conditions in some locations may require additional corrosion protection for the pipes prior to burial.

The following guidelines are recommended for underground installations:

1. Use proper trench safety procedures as required by local codes
2. Leveling course should be free from frozen material, large or sharp stones. A minimum 2-4" thick leveling course is recommended.
3. Ensure that pipes are properly pitched and evenly supported along the length of the pipe. Remove material from under the joint so sockets do not bear the weight of the pipes.
4. Brace changes in direction and end of pipe runs to prevent pipes from pushing apart prior to testing and backfilling.
5. 4" of fill surrounding pipes should be sand or crushed stone with maximum 15% passing through 0.075" screen.
6. Apply fill material carefully and compress evenly to 93% standard proctor.

## Installation in concrete

Some concrete additives such as accelerators or retardants, antifreeze, fluidifiers etc. may be corrosive to stainless steel. If additives are used, wrapping or lacquer coating may be required to protect the pipe system.

## Changes in Direction


All vertical and horizontal pipes must be fastened at all changes of direction and all branches with hangers spaced no more than 2'6" (750mm).

## Vertical Runs

Vertical pipes should be supported at intervals no more than 9.8' (3 meters). Straight horizontal pipe runs should be supported at maximum spacing indicated in the chart below.

### HORIZONTAL HANGER SPACING

PIPE SIZE	D (max)
1-1/2"	6.6' (2.0)
2"	6.6' (2.0)
3"	8.2' (2.5)
4"	9.2' (2.8)
6"	10.8' (3.3)
8"	10.8' (3.3)

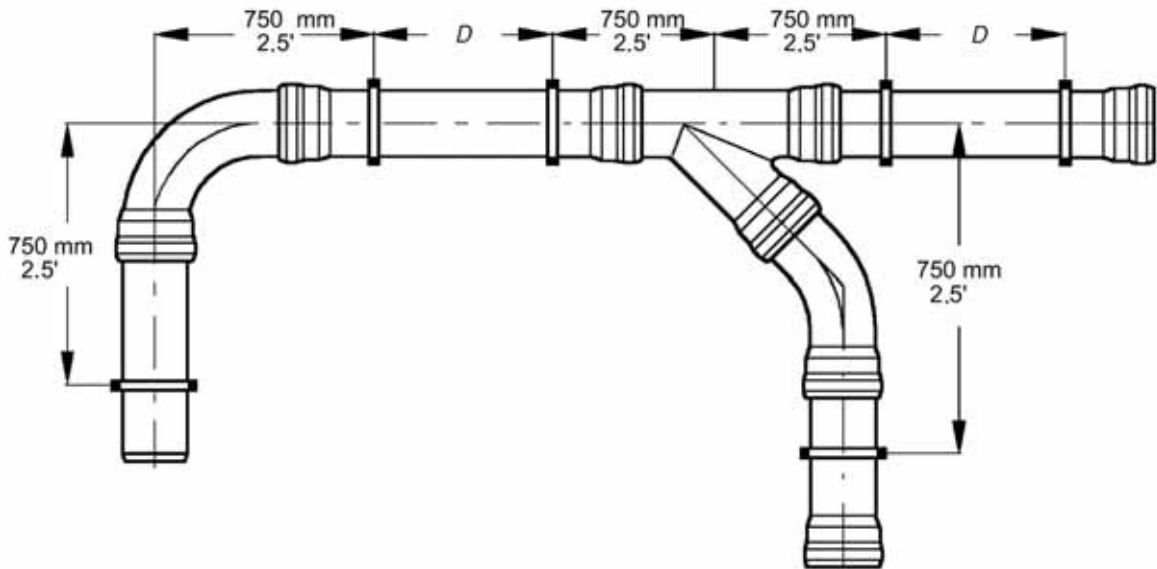

## Transition Fittings

The Josam Push-Fit system can be easily adapted to most pipe systems. For information on adapting the Josam Push-Fit system to other pipe systems please contact your local Josam representative or Josam Company directly.

# CHEMICAL RESISTANCE CHART

## RATINGS

A	Excellent.
B	Good -- Minor Effect, slight corrosion or discoloration.
C	Fair -- Moderate Effect, not recommended for continuous use. Softening, loss of strength or swelling may occur.
D	Severe Effect, not recommended for ANY use.
N/A	Information Not Available.

**CAUTION!**  
The information in this chart has been compiled from several reputable sources, including "Corrosion Data Survey", 6th Ed., NACE, and is intended for use as reference information only.

Specific application factors including temperature and concentration may affect suitability and it is recommended that the user test for compatibility.

CHEMICAL	316 SS	304 SS	EPDM	FPM
Acetic Acid 20%	A	A	A	B
Acetic Acid 80%	A	B	A	B
Acetic Anhydride	A	B	B	D
Acetone	A	A	A	D
Alcohols: Amyl	A	A	A	A
Alcohols: Benzyl	A	A	B	A
Alcohols: Butyl (Butanol)	A	A	A	A
Alcohols: Isopropyl	B	B	A	A
Alcohols: Methyl	A	A	A	C
Aluminum Chloride	C	D	A	A
Aluminum Chloride 20%	D	D	A	A
Aluminum Sulfate (<200° F)	A	A	A	A
Ammonium Carbonate	A	A	A	A
Ammonium Chloride	B	C	A	A
Ammonium Hydroxide	A	A	A	B
Amyl Chloride	A	A	D	B
Aniline	A	A	B	C
Aniline Hydrochloride	D	D	B	B
Antifreeze	A	N/A	A	A
Asphalt	A	B	D	A
Barium Chloride	B	B	A	A
Barium Hydroxide	A	B	A	A
Beer	A	A	A	A
Beet Sugar Liquids	A	A	A	A
Benzaldehyde	A	A	A	D
Benzene	A	A	D	A
Benzoic Acid	B	B	D	A
Borax (Sodium Borate)	A	A	A	A
Boric Acid	A	A	A	A
Bromine	D	D	D	A
Butter	A	C	A	A
Buttermilk	A	A	A	A
Butylacetate	A	A	B	D
Butyric Acid	B	B	B	B
Calcium Bisulfate	A	N/A	A	A
Calcium Bisulfide	B	B	C	A
Calcium Bisulfite	A	B	D	A
Calcium Chloride	B	B	A	A
Calcium Hydroxide	B	B	A	A
Calcium Hypochlorite	B	C	B	A
Carbon Dioxide (dry)	A	A	B	B
Carbon Dioxide (wet)	A	A	B	B
Carbon Disulfide	A	A	D	A
Carbon Monoxide	A	A	A	A
Carbon Tetrachloride	A	A	D	N/A
Carbonic Acid	A	A	B	A
Catsup	A	A	A	A
Chlorine (dry)	A	A	A	A
Chlorine Water	C	C	C	A
Chloroacetic Acid	C	C	B	D
Chlorobenzene (Mono)	B	A	D	A
Chloroform	B	B	D	A
Chlorosulfonic Acid	B	D	D	C
Chocotate Syrup	A	A	A	A
Chromic Acid 5%	C	B	A	A
Cider	A	A	A	A
Citric Acid	A	B	A	A
Citric Oils	A	A	B	A
Coffee	A	A	A	A
Copper Chloride	C	C	A	A
Copper Cyanide	B	B	A	A
Copper Nitrate	A	A	N/A	A
Copper Sulfate >5%	B	B	A	A
Detergents	A	A	A	A
Diesel Fuel	A	A	D	A
Dyes	A	A	N/A	A
Epsom Salt (Magnesium Sulfate)	B	A	A	A
Ethanol	A	A	A	A
Ethanolamine	A	A	B	D
Ether	A	A	C	C
Ethyl Chloride	A	A	A	A
Ethyl Ether	B	B	D	D
Fatty Acids	A	B	D	A
Fluorine	A	A	A	C
Formaldehyde 100%	A	A	A	D
Formic Acid (<100° F)	A	A	A	C
Fruit Juice	A	A	N/A	A
Fuel Oils	A	A	D	A
Furfural	B	A	C	D
Gallic Acid	B	A	B	A
Gelatin	A	A	A	A
Glucose	A	A	A	A
Glycerin	A	A	A	A
Glycolic Acid	A	A	A	A
Grape Juice	A	A	A	A
Hydrochloric Acid	D	D	A	A

CHEMICAL	316 SS	304 SS	EPDM	FPM
Hydrogen Peroxide 10%	A	A	A	B
Iodine	D	D	B	A
Lead Acetate	B	B	A	D
Magnesium Chloride	D	D	A	A
Magnesium Sulfate (Epsom Salts)	B	A	A	A
Mercury	A	A	A	A
Methanol (Methyl Alcohol)	A	A	A	C
Methyl Chloride	A	A	D	A
Methylene Chloride	B	B	C	B
Milk	A	A	A	A
Mineral Spirits	A	A	D	A
Molasses	A	A	A	A
Naphthalene	A	A	D	A
Natural Gas	A	A	D	A
Nickel Chloride (<10%)	B	B	A	A
Nickel Sulfate	B	B	A	A
Nitric Acid (20%)	A	A	A	A
Nitrous Acid	B	B	A	B
Oxalic Acid	C	C	A	A
Ozone	A	B	A	A
Perchloric Acid	D	D	B	A
Phosphoric Acid (crude)	B	D	B	A
Picric Acid (<10%)	A	A	B	A
Potash (Potassium Carbonate)	A	A	A	A
Potassium Bicarbonate	B	B	A	A
Potassium Bromide	B	B	A	A
Potassium Chlorate	A	A	A	A
Potassium Chloride	A	B	A	A
Potassium Hydroxide (Caustic Potash)	A	B	A	B
Potassium Nitrate	B	B	A	A
Potassium Permanganate	A	A	A	A
Potassium Sulfate	A	A	A	A
Potassium Sulfide	B	B	A	A
Propylene Glycol	B	B	A	A
Pyridine	A	A	B	D
Rum	A	A	A	A
Salicylic Acid	B	B	A	A
Salt Brine (NaCl saturated)	A	B	A	A
Sea Water	C	C	A	A
Silver Nitrate	A	B	A	A
Soap Solutions	A	A	A	A
Soda Ash (see Sodium Carbonate)	A	A	A	A
Sodium Acetate	A	A	A	D
Sodium Bicarbonate	A	A	A	A
Sodium Bisulfate	B	D	A	A
Sodium Bisulfite (<100° F)	A	B	A	A
Sodium Bromide	B	C	A	A
Sodium Carbonate	A	A	A	A
Sodium Chlorate	B	A	A	A
Sodium Chloride	B	B	A	A
Sodium Cyanide (<200° F)	A	A	A	A
Sodium Fluoride (<10%)	A	C	A	A
Sodium Hydroxide (20%)	A	A	B	C
Sodium Hypochlorite (<20%)	C	C	B	A
Sodium Hypochlorite (100%)	D	D	B	A
Sodium Nitrate	A	A	A	A
Sodium Peroxide	A	A	A	A
Sodium Polyphosphate	B	B	A	A
Sodium Silicate	B	A	A	A
Sodium Sulfate	A	A	A	A
Sodium Sulfide (<10%)	A	B	A	A
Sodium Sulfite	A	B	A	A
Stannic Chloride (<10%)	B	B	A	A
Stannous Chloride	B	C	C	A
Starch	A	A	A	A
Stearic Acid	A	B	B	A
Sugar (Liquors)	A	A	A	A
Sulfate (Liquors)	B	B	A	A
Sulfur Chloride (100%)	A	A	D	A
Sulfur Dioxide (<10%)	A	D	A	A
Sulfuric Acid (<10%)	B	D	A	A
Sulfuric Acid (10-75%)	D	D	B	A
Sulfurous Acid (Solution)	B	B	B	A
Toluene (Toluol)	A	A	D	B
Tomato Juice	A	A	A	A
Trichloroethylene	A	A	D	A
Trisodium Phosphate	B	B	A	A
Turpentine	A	A	D	A
Urea	B	B	A	A
Urine	A	A	A	A
Vegetable Juice	A	A	A	A
Vinegar	A	A	A	A
Water, Deionized	A	A	A	A
Whiskey & Wines	A	A	A	A
Xylene	A	A	D	B
Zinc Sulfate	A	A	A	A





[www.josam.com](http://www.josam.com)

**Executive Offices**  
2501 S Front Street  
Philadelphia, PA 19148  
Phone: 215.339.5370  
Fax: 800.962.3312

**Corporate Headquarters**  
525 West Highway 20  
Michigan City, IN 46360  
Phone: 800-365-6726  
Fax: 800-627-0008